
Page 1 of 3



FITTING INSTRUCTIONS FOR BE0202 BAR-END's TO FIT YAMAHA XSR 900 2022-

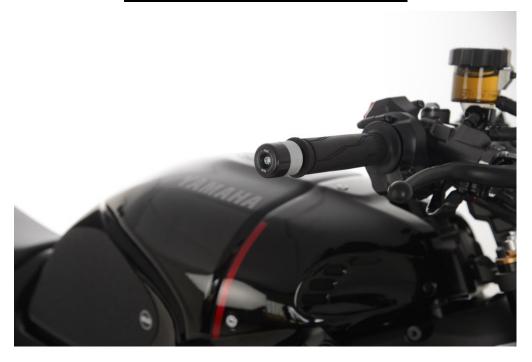

This Kit contains the items pictured and labelled over page.

Some parts may be shown for clarity of instructions only.

Do not proceed until you are sure all parts are present.

Please read all instructions before proceeding.

IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF OUR DEALERS OR HAVE FITTED BY A QUALIFIED TECHNICIAN.

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike.

In the event of rubber washers being used to hold components onto bolts, these rubber washers can be thrown away.

DIGITAL COPIES OF THESE INSTRUCTIONS ARE AVAILABLE FROM

www.rg-racing.com

Page 2 of 3 BE0202




TOOLS REQUIRED	GENERAL TORQUE SETTINGS
 Set of Metric Allen keys. 	M4 BOLT = 8Nm
• 19mm Spanner	M5 BOLT = 12Nm
	M6 BOLT = 15Nm
	M8 BOLT = 20Nm
	M10 BOLT = 40Nm
	M12 BOLT = 40Nm

LEGEND

ITEM No.	DESCRIPTION	QTY
ITEM 1	STAINLESS BAR-ENDS—M0711 (BOTH SIDES)	2
ITEM 2	BAR END BOBBIN B0404 (BOTH SIDES)	2
ITEM 3	M8x1.0x20mm LONG CAP HEAD BOLTS (BOTH SIDES)	2

ASSEMBLY DIAGRAM



Page **3** of **3**



FITTING INSTRUCTIONS

- Remove the OEM Bar-end mirror.
- Screw Stainless Bar-end (ITEM 1) into the Bar, ensure it is tight.
- Place the M8 bolt (ITEM 3) through the bar end bobbin (ITEM 2).
- With (ITEM 2) and (ITEM 3) together, now place on the end of (ITEM 1) and tighten to the correct torque setting as shown above in <u>GENERAL TORQUE</u> SETTINGS.
- Ensure the product is tight and secure before riding.

If mirrors are desired, handlebar mounted mirrors will be required.

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.