



**FITTING INSTRUCTIONS FOR BLP0104BK FOOTREST BLANKING PLATES
FOR KAWASAKI NINJA 1000SX 2020-**



PICTURE A

THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED OVER PAGE.

SOME PARTS MAY BE SHOWN FOR CLARITY OF INSTRUCTIONS ONLY.

DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING.

**IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF
OUR DEALERS OR HAVE FITTED BY A QUALIFIED TECHNICIAN.**

PLEASE NOTE THAT THE WAY THE KIT IS PACKED DOES NOT NECESSARILY REPRESENT THE
WAY OF MOUNTING TO THE BIKE.

IN THE EVENT OF RUBBER WASHERS BEING USED TO HOLD COMPONENTS ONTO BOLTS,
THESE RUBBER WASHERS CAN BE THROWN AWAY.

DIGITAL COPIES OF THESE INSTRUCTIONS ARE AVAILABLE FROM:


WWW.RG-RACING.COM



<u>TOOLS REQUIRED</u>	<u>GENERAL TORQUE SETTINGS</u>
<ul style="list-style-type: none"> Set of Metric Allen Keys to include 5 and 6mm A/F. 	M4 BOLT = 8Nm M5 BOLT = 12Nm M6 BOLT = 15Nm M8 BOLT = 20Nm M10 BOLT = 40Nm M12 BOLT = 40Nm

LEGEND

ITEM NO.	DESCRIPTION	QTY
ITEM 1	L-H-S FOOTREST BLANKING PLATE (BLPF0007)	1
ITEM 2	4mm WIDE SPACER (S0985)	1
ITEM 3	M8x20mm LONG COUNTER-SINK BOLT	1
ITEM 4	M8x15mm LONG COUNTER-SINK BOLT	1

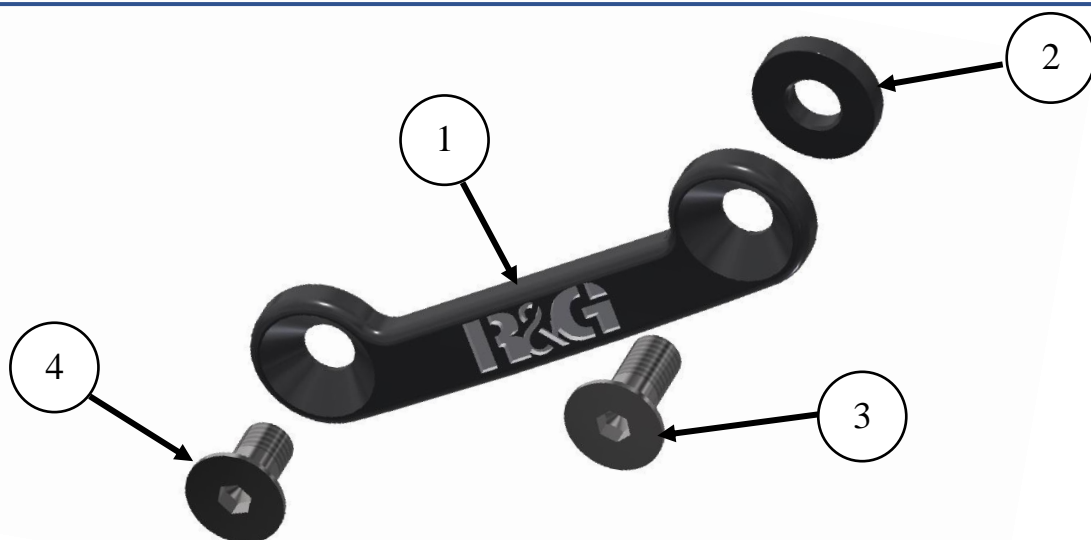

COMPONENT PARTS



FITTING INSTRUCTIONS

Left hand side (as you sit on the motorcycle)

- Remove the original footrest bracket.
- Offer the left-hand side blanking plate (**item 1**) into position and secure in position using the shorter M8 counter-sink bolt (**item 4**) through the forward hole as shown in **picture A**.
- Place the spacer (**item 2**) between the frame and the blanking plate aligned with the rear mounting hole, then use the longer M8 counter-sink bolt (**item 3**) to secure in position as shown in **picture A**.
- Tighten both bolts.

ISSUE 1 07/04/2020 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



NOTICE DE MONTAGE POUR BLP0104BK
PLAQUES D'OBTURATION DES REPOSES PIEDS
POUR KAWASAKI NINJA 1000SX 2020-



PHOTO A

CE KIT CONTIENT LES ARTICLES ILLUSTRÉS ET ÉTIQUETES SUR LA PAGE.

CERTAINES PARTIES PEUVENT ÊTRE PRÉSENTES UNIQUEMENT POUR LA CLARTE DES INSTRUCTIONS.

NE PAS PROCÉDER AU MONTAGE TANT QUE VOUS N'ÊTES PAS SÛR QUE TOUTES LES PIÈCES SOIENT PRÉSENTES.

VEUILLEZ LIRE TOUTES LES INSTRUCTIONS AVANT DE CONTINUER.

EN CAS DE DOUTE LORS DU MONTAGE DE NOS PRODUITS, CONSULTEZ UN DE NOS REVENDEURS OU FAITES APPEL À UN TECHNICIEN QUALIFIÉ.

VEUILLEZ NOTER QUE LA FAÇON DONT LE KIT EST EMBALLÉ NE REPRÉSENTE PAS NECESSAIREMENT LA MANIÈRE DE LE MONTER SUR LA MOTO.

SI DES RONDELLES EN CAOUTCHOUC SONT UTILISÉES POUR MAINTENIR LES COMPOSANTS SUR LES BOULONS, ELLES PEUVENT ÊTRE JETÉES.


NOTICE DISPONIBLE AU TÉLÉCHARGEMENT SUR : WWW.RG-RACING.COM



<u>OUTILS REQUIS</u>	<u>VALEURS DE SERRAGE RECOMMANDÉES</u>
<ul style="list-style-type: none"> Clés Allen 5 et 6mm. 	M4 BOULON = 8Nm M5 BOULON = 12Nm M6 BOULON = 15Nm M8 BOULON = 20Nm M10 BOULON = 40Nm M12 BOULON = 40Nm

LÉGENDE

ARTICLE NO.	DESCRIPTION	QTÉ
ARTICLE 1	PLAQUE D'OBTURATION REPOSE PIED GAUCHE (BLPF0007)	1
ARTICLE 2	4mm ENTRETOISE (S0985)	1
ARTICLE 3	M8x20mm BOULON	1
ARTICLE 4	M8x15mm BOULON	1

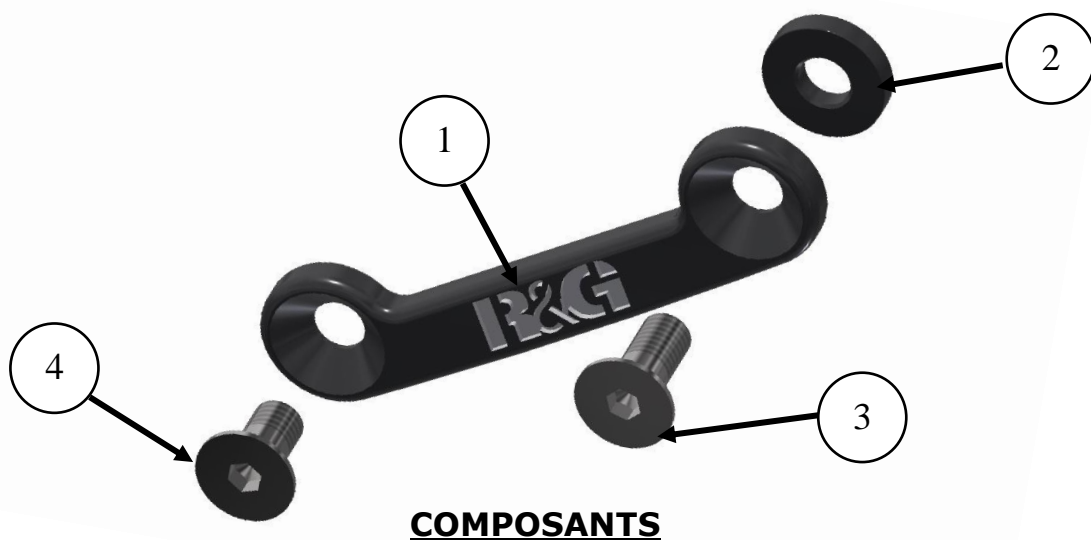

COMPOSANTS



NOTICE DE MONTAGE

Côté gauche (lorsque vous êtes assis sur la moto)

- Retirez le support de repose-pieds d'origine.
- Mettez la plaque d'obturation gauche (article 1) en place et fixez-la à l'aide du boulon de contre-alésage M8 plus court (article 4) à travers le trou avant, comme indiqué sur la photo A.
- Placer l'entretoise (article 2) entre le cadre et la plaque d'obturation alignée avec le trou de montage arrière, puis utiliser le boulon de contre-alésage M8 plus long (article 3) pour fixer en position comme indiqué sur la photo A.
- Serrez les deux boulons.

ISSUE 1 07/04/2020 (NSY)

MONTAGEANLEITUNG FÜR BLP0104BK ABDECKPLATTE - FUSSRASTE

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



FÜR KAWASAKI NINJA 1000SX 2020-



ABBILDUNG A

ALLE KIT-TEILE SIND UNTEN ABGEBILDET UND GEKENNZEICHNET.

DIE ABGEBILDETEN TEILE DIENEN LEDIGLICH ZUR ERKLÄRUNG.

ÜBERPRÜFEN SIE ZUERST, DASS ALLE TEILE VORHANDEN SIND.

LESEN SIE DIE MONTAGEANLEITUNG KOMPLETT DURCH, BEVOR SIE ANFANGEN.

**WENN SIE BEI DER MONTAGE DIESES PRODUKTES UNSICHER SIND,
BITTE EINEN UNSERER HÄNDLER KONTAKTIEREN ODER DAS KIT VON
EINEM QUALIFIZIERTEN ZWEIRAD-MECHANIKER MONTIEREN LASSEN.**

DIE VERPACKUNG DER TEILE STELLT NICHT DIE REIHENFOLGE DER MONTAGE DAR.

HINWEIS FÜR KITS MIT PLASTIKUNTERLEGSSCHEIBEN AN DEN SCHRAUBEN –
DIESE PLASTIK-UNTERLEGSSCHEIBEN WERDEN NICHT FÜR DEN EINBAU BENÖTIGT!

**EINE DIGITALE VERSION DIESER MONTAGEANLEITUNG KANN AUF
FOLGENDER SEITE HERUNTERGELADEN WERDEN:**


[WWW.RG-RACING.COM](http://www.rg-racing.com)



<u>SIE BENÖTIGEN FOLGENDES</u>	<u>ALLGEM. ANZUGSDREHMOMENT</u>
<ul style="list-style-type: none"> • Satz Inbusschlüssel mit 5 und 6mm A/F 	M4 SCHRAUBE = 8Nm M5 SCHRAUBE = 12Nm M6 SCHRAUBE = 15Nm M8 SCHRAUBE = 20Nm M10 SCHRAUBE = 40Nm M12 SCHRAUBE = 40Nm

LIEFERUMFANG

ARTIKEL NR.	BESCHREIBUNG	MENGE
ARTIKEL 1	ABDECKPLATTE LINKE SEITE (BLPF0007)	1
ARTIKEL 2	DISTANZHALTER 4mm BREITE (S0985)	1
ARTIKEL 3	M8x20mm SENKSCHRAUBE	1
ARTIKEL 4	M8x15mm SENKSCHRAUBE	1

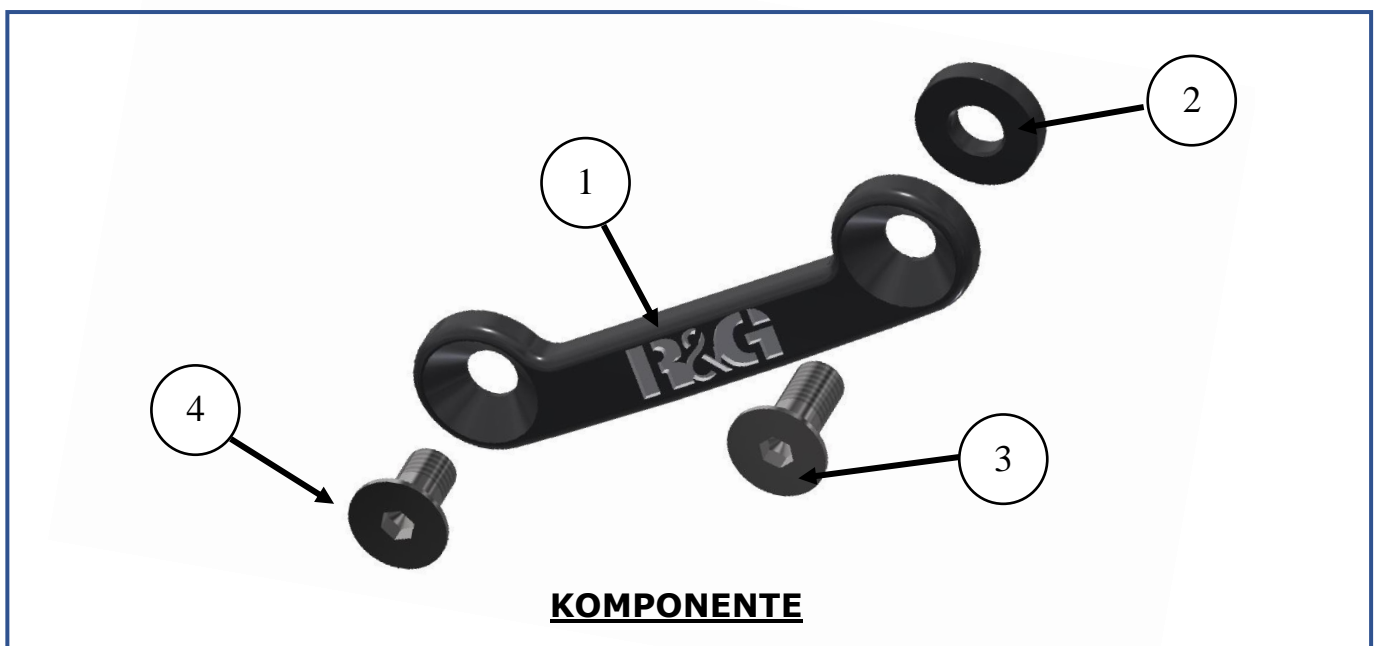



MONTAGEANLEITUNG

Linke Seite (in Fahrtrichtung)

- Entfernen Sie die original Fußrasten-Halterung.
- Die Abdeckplatte für die linke Seite (**Artikel 1**) in Position bringen und mit der kürzeren M8 Senkschraube (**Artikel 4**) in der vorderen Öffnung sichern wie in **Abbildung A** abgebildet.
- Den Distanzhalter (**Artikel 2**) zwischen dem Rahmen und der Abdeckplatte und mit der hinteren Montageöffnung ausgerichtet platzieren. Mit der längeren M8 Senkschraube (**Artikel 3**) in Position sichern wie in **Abbildung A** abgebildet.
- Ziehen Sie bei Schrauben fest.

AUSGABE 1 07/04/2020 (NSY)