

Page **1** of **6**



FITTING INSTRUCTIONS FOR FSS0003 FORK SPINDLE SLIDERS TO FIT OHVALE 110/160





Picture A Picture B

This Kit contains the items pictured and labelled over page.

Some parts may be shown for clarity of instructions only.

Do not proceed until you are sure all parts are present.

Please read all instructions before proceeding.

<u>IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF OUR DEALERS</u> <u>OR HAVE FITTED BY A QUALIFIED TECHNICIAN.</u>

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike.

In the event of rubber washers being used to hold components onto bolts, these rubber washers can be thrown away.

DIGITAL COPIES OF THESE INSTRUCTIONS ARE AVAILABLE FROM

www.rg-racing.com

Page 2 of 6 FSS0003





TOOLS REQUIRED	GENERAL TORQUE SETTINGS
• 5mm ALLEN KEY.	M4 BOLT = 8Nm
	M5 BOLT = 12Nm
	M6 BOLT = 15Nm
	M8 BOLT = 20Nm
	M10 BOLT = 40Nm
	M12 BOLT = 40Nm

LEGEND

ITEM No.	DESCRIPTION	QTY
ITEM 1	M6 FLAT CAPS (BOTH SIDES)	2
ITEM 2	M6 x 40mm CAP HEAD BOLTS (BOTH SIDES)	2
ITEM 3	M6 WASHERS (16mm O/D) (BOTH SIDES)	2
ITEM 4	B0443 M8 COTTON REELS (BOTH SIDES)	2

ASSEMBLY DIAGRAM

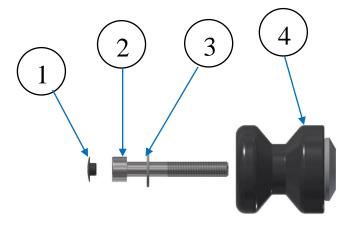



Page **3** of **6**



FITTING INSTRUCTIONS

- Fit one washer (item 3) onto one of the cap head bolts (item 2).
- Feed the bolt and washer through either of the cotton reels (**item 4**) and secure in position on the front forks as shown in **pictures A** and **B**.
- fit one of the flat caps (item 1) into the head of the bolt.
- repeat the above for the other side.

ISSUE 1 - 31/03/2021 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

Page **4** of **6**



NOTICE DE MONTAGE POUR FSS0003 SLIDERS DE FOURCHE POUR OHVALE 110/160





Photo A Photo B

CE KIT CONTIENT LES ARTICLES ILLUSTRES ET ETIQUETES SUR LA PAGE.

CERTAINES PARTIES PEUVENT ETRE PRESENTES UNIQUEMENT POUR LA CLARTE DES INSTRUCTIONS.

NE PAS PROCEDER AU MONTAGE TANT QUE VOUS N'ETES PAS SUR QUE TOUTES LES PIECES SOIENT PRESENTES.

VEUILLEZ LIRE TOUTES LES INSTRUCTIONS AVANT DE CONTINUER.

EN CAS DE DOUTE LORS DU MONTAGE DE NOS PRODUITS, CONSULTEZ UN DE NOS REVENDEURS OU FAITES APPEL A UN TECHNICIEN QUALIFIÉ.

VEUILLEZ NOTER QUE LA FAÇON DONT LE KIT EST EMBALLE NE REPRESENTE PAS NECESSAIREMENT LA MANIERE DE LE MONTER SUR LA MOTO.

SI DES RONDELLES EN CAOUTCHOUC SONT UTILISEES POUR MAINTENIR LES COMPOSANTS SUR LES BOULONS, ELLES PEUVENT ETRE JETEES.

NOTICE DISPONIBLE AU TELECHARGEMENT SUR: WWW.RG-RACING.COM





OUTILS REQUIS	VALEURS DE SERRAGE
• 5mm CLÉ ALLEN.	M4 BOULON = 8Nm
	M5 BOULON = 12Nm
	M6 BOULON = 15Nm
	M8 BOULON = 20Nm
	M10 BOULON = 40Nm
	M12 BOULON = 40Nm

LÉGENDE

ARTICLE No.	DESCRIPTION	QTÉ
ARTICLE 1	M6 CAPUCHONS PLATS (DES 2 CÔTÉS)	2
ARTICLE 2	M6 x 40mm BOULONS (DES 2 CÔTÉS)	2
ARTICLE 3	M6 RONDELLES (16mm O/D) (DES 2 CÔTÉS)	2
ARTICLE 4	B0443 M8 BOBINES (DES 2 CÔTÉS)	2

SCHÉMA D'ENSEMBLE

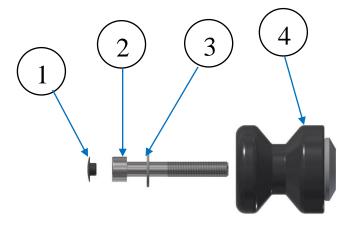



Page **6** of **6**



NOTICE DE MONTAGE

- Monter une rondelle (article 3) sur l'un des boulons à tête cylindrique (article 2).
- Faites passer le boulon et la rondelle à travers l'une des bobines (article 4) et fixez-les en position sur les fourches avant comme indiqué sur les photos A et B.
- Insérer l'un des capuchons plats (article 1) dans la tête du boulon.
- Répétez ce qui précède pour l'autre côté.

ISSUE 1 - 31/03/2021 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.