



SRG0060

Fitting Instructions for SRG0060SS Radiator Guard
YAMAHA MT-09 2017-/MT-09 TRACER 2015-/XSR900 2016-

Page | 1



In This Kit There Should Be
1x Radiator Guard (SRG0060)
1x S0722 Spacer
1x M6x 35mm Long Button Head Bolt
1x M6 Washer
1x Cable Tie
2x 100mm Lengths of self-adhesive Foam




Picture 1



Picture 2



SRG0060

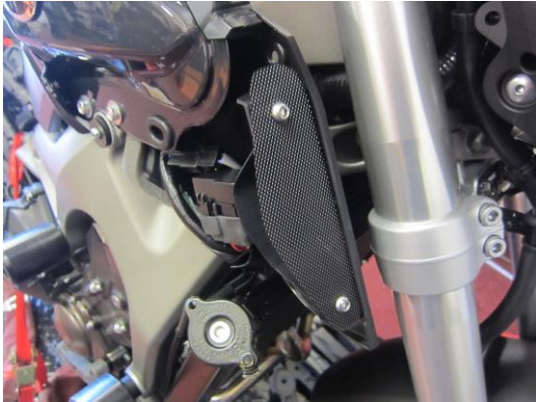

Picture 3



Picture 4



Picture 5



Picture 6



Picture 7



Picture 8



SRG0060

TOOLS REQUIRED

- Metric Allen keys set to include 3mm, 4mm & 5mm A/F.
 - Cable Cutters

Page | 3

FITTING INSTRUCTIONS

- To fit the radiator guard to the bike cut the foam strip provided into 10mm wide pieces and stick them to the back of the radiator guard frame, so that they sit between the radiator guard and the radiator.
- Remove the bolt that secures the top left of the radiator in place, as shown in picture 1.
- On the right side of the bike, the plastic bodywork around the air duct needs to be removed. To do this, remove the bolts as shown in picture 2, along with the two push rivets on the back side and gently pull away, as shown in picture 3.
- Now the top right mounting bolt can be removed, as shown in picture 4.
- With the bolt removed, replace with the top hat spacer provided in the kit. The smaller diameter end will fit in the rubber mount, as shown in picture 5.
- Offer the R&G Radiator Guard into place on the bike, ensuring that the brackets on the top of the radiator guard locate either side of the rubber mounts on the top of the radiator. On the right side, fit the M6 x 35mm long button head bolt provided through the radiator guard, spacer, rubber mount and tighten into the frame mount, as shown in picture 6.
- On the left side of the bike, the original OEM bolt can be refitted, first through the radiator guard then the rubber mount and into the frame mount, as shown in picture 7.
- Locate the cable tie through the two slots on the lower mount of the radiator guard and wrap around the lower radiator mount, before tightening, as shown in picture 8.
- Ensure the radiator guard is correctly mounted and tighten all bolts evenly.
- Re-fit the two push rivets and bolt that secure the right side air duct in place.

ISSUE 1 02/05/2018 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



SRG0060

INSTRUCTIONS DE MONTAGE POUR SRG0060 Grille de protection
YAMAHA MT-09 2017-/MT-09 TRACER 2015-/XSR900 2016-

Page | 4



Le kit doit contenir :

1x Grille de protection (SRG0060)

1x S0722 Entretoise

1x Boulon M6x 35mm

1x M6 Rondelle

1x Collier de serrage

2x 100mm Longueurs de mousse autocollante



Photo 1



Photo 2

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



SRG0060

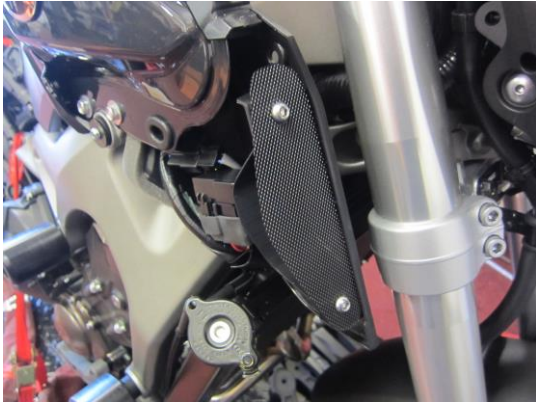


Photo 3



Photo 4



Photo 5



Photo 6



Photo 7



Photo 8



SRG0060

OUTILS REQUIS

- Clés Allen 3mm, 4mm & 5mm
 - Coupe câble

Page | 6 Instructions de montage:

- Couper la mousse en bandeaux de 10mm puis collez ces bandeaux au bas du support de protection radiateur, de façon à ce que ces bandeaux se situent entre la protection radiateur et le radiateur.
- Enlever le boulon qui fixe le coté gauche supérieur du radiateur en place (Photo 1).
- Du coté droit de la moto, le carénage en plastic autour du conduit d'air doit être enlevé. Pour cela, enlever les boulons (Photo 2), avec les 2 rivets pousoirs au bas, puis tirez doucement (Photo 3).
- A présent le boulon de fixation en haut à droite peut être enlevé (Photo 4).
- Une fois le boulon enlevé, remplacez le par l'entretoise du haut fournie dans le kit. L'extrémité avec le plus petit diamètre va dans le support en caoutchouc (Photo 5).
- Mettre la grille de protection R&G en place sur la moto, en veillant à ce que les supports du haut de la grille de protection soient placés dans les supports en caoutchouc sur le haut du radiateur. Du coté droit, passer le boulon M6 x 35mm fourni à travers la grille de protection radiateur, l'entretoise, le support en caoutchouc, puis serrer dans le support cadre (Photo 6).
- Du coté gauche de la moto, le boulon d'origine peut à présent être remis, d'abord à travers la grille de protection radiateur, puis le support en caoutchouc et enfin dans le support cadre (Photo 7).
- Passer le collier de serrage à travers les 2 fentes sur le support inférieur de la grille de protection radiateur puis encercler le support radiateur inférieur, avant de serrer (Photo 8).
- Veillez à ce que la grille de protection radiateur soit correctement montée puis serrer tous les boulons de façon égale.
- Remettre les 2 rivets pousoirs et le boulon qui fixe le coté droit du conduit d'air en place.

ISSUE 1 02/05/2018 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



SRG0060

Montageanleitung für den SRG0060 Kühlerschutz
YAMAHA MT-09 2017-/MT-09 TRACER 2015-/XSR900 2016-

Page | 7



Dieser Kit enthält
1x Kühlerschutz (SRG0060)
1x S0722 Abstandshalter
1x M6x 35mm Halbrundkopfschraube
1x M6 Unterlegscheibe
1x Kabelbinder
2x 100mm selbstklebende Schaumstoffstreifen



Abbildung 1



Abbildung 2



SRG0060

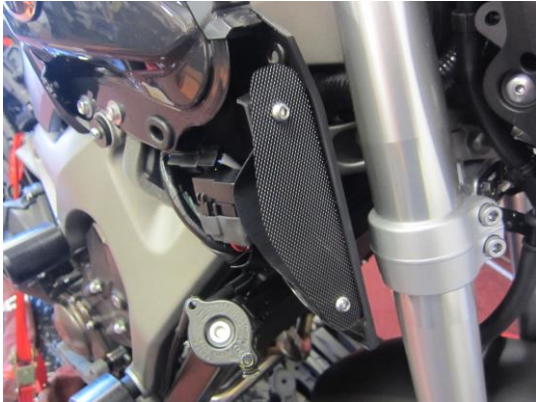


Abbildung 3



Abbildung 4



Abbildung 5



Abbildung 6



Abbildung 7



Abbildung 8



SRG0060

SIE BENÖTIGEN FOLGENDES WERKZEUG

- 3, 4 & 5 mm Inbusschlüssel
- Seitenschneider

Page | 9 **MONTAGEANLEITUNG**

- Um den Kühlerschutz am Motorrad zu montieren, schneiden Sie zuerst die mitgelieferten Schaumstoff-Streifen in 10 mm breite Streifen und kleben Sie diese auf der Rückseite des Kühlerschutzrahmens, so dass sie zwischen dem Kühlerschutz und dem Kühler angebracht sind.
- Entfernen Sie die Schraube, die den Kühler oben links befestigt – siehe Abbildung 1.
- Auf der rechten Seite des Motorrades muss die Plastikverkleidung um den Lufteinlass entfernt werden. Entfernen Sie hierfür die Schrauben, die in Abbildung 2 abgebildet sind zusammen mit den zwei Nieten auf der Rückseite und vorsichtig wegziehen, wie in Abbildung 3 gezeigt.
- Nun entfernen Sie die obere Montageschraube rechts – siehe Abbildung 4.
- Wenn die Schraube entfernt ist, ersetzen Sie sie mit dem Abstandhalter vom Kit. Das Ende mit dem kleineren Durchmesser passt in die Gummihalterung – siehe Abbildung 5.
- Den R&G Kühlerschutz am Motorrad anbringen – darauf achten, dass die Halterungen oben am Kühlerschutz auf beiden Seiten der Gummihalterungen oben am Kühler positioniert sind. Auf der rechten Seite die M6 x 35mm Halbrundkopfschraube vom Kit durch den Kühlerschutz, den Abstandhalter und die Gummihalterung führen und in der Rahmenhalterung befestigen – siehe Abbildung 6.
- Auf der linken Seite des Motorrades die Originalschraube wieder montieren – zuerst durch den Kühlerschutz, dann durch die Gummihalterung und anschließend in die Rahmenhalterung einführen – siehe Abbildung 7.
- Den Kabelbinder durch beide Öffnungen in der unteren Kühlerschutz-Halterung führen und um die untere Kühlerschutz-Halterung wickeln und festziehen – siehe Abbildung 8.
- Überprüfen Sie, dass der Kühlerschutz ordnungsgemäß montiert ist und ziehen Sie alle Schrauben gleichmäßig fest.
- Montieren Sie die zwei Nieten und die Schraube, die den Lufteinlass rechts in Position befestigen.

AUSGABE 1 02/05/2018 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com