



**FITTING INSTRUCTIONS FOR RAD0375PRO**



**THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED OVER PAGE.**  
SOME PARTS MAY BE SHOWN FOR CLARITY OF INSTRUCTIONS ONLY.

DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

**PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING.**

**IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF OUR DEALERS  
OR HAVE FITTED BY A QUALIFIED TECHNICIAN.**

PLEASE NOTE THAT THE WAY THE KIT IS PACKED DOES NOT NECESSARILY REPRESENT THE WAY OF  
MOUNTING TO THE BIKE.

IN THE EVENT OF RUBBER WASHERS BEING USED TO HOLD COMPONENTS ONTO BOLTS,  
THESE RUBBER WASHERS CAN BE THROWN AWAY.




| <b><u>TOOLS REQUIRED</u></b>                                                                  | <b><u>GENERAL TORQUE SETTINGS</u></b>                                                                     |
|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• SET OF ALLEN KEYS</li> <li>• WIRE CUTTERS</li> </ul> | M4 BOLT = 8Nm<br>M5 BOLT = 12Nm<br>M6 BOLT = 15Nm<br>M8 BOLT = 20Nm<br>M10 BOLT = 40Nm<br>M12 BOLT = 40Nm |

### **LEGEND**

| <b>ITEM NO.</b> | <b>DESCRIPTION</b>               | <b>QTY</b> |
|-----------------|----------------------------------|------------|
| ITEM 1          | RAD0375PRO RADIATOR GUARD        | 1          |
| ITEM 2          | MOUNTING PLATE                   | 1          |
| ITEM 3          | 200mm LENGTH OF RUBBER U-CHANNEL | 1          |
| ITEM 4          | 12mm BUTTON HEAD BOLT            | 1          |
| ITEM 5          | WASHER                           | 1          |
| ITEM 6          | RUBBER BUNG                      | 5          |


### **FITTING DIAGRAM**

FRONT OF RAD GUARD






## ASSEMBLY DIAGRAM

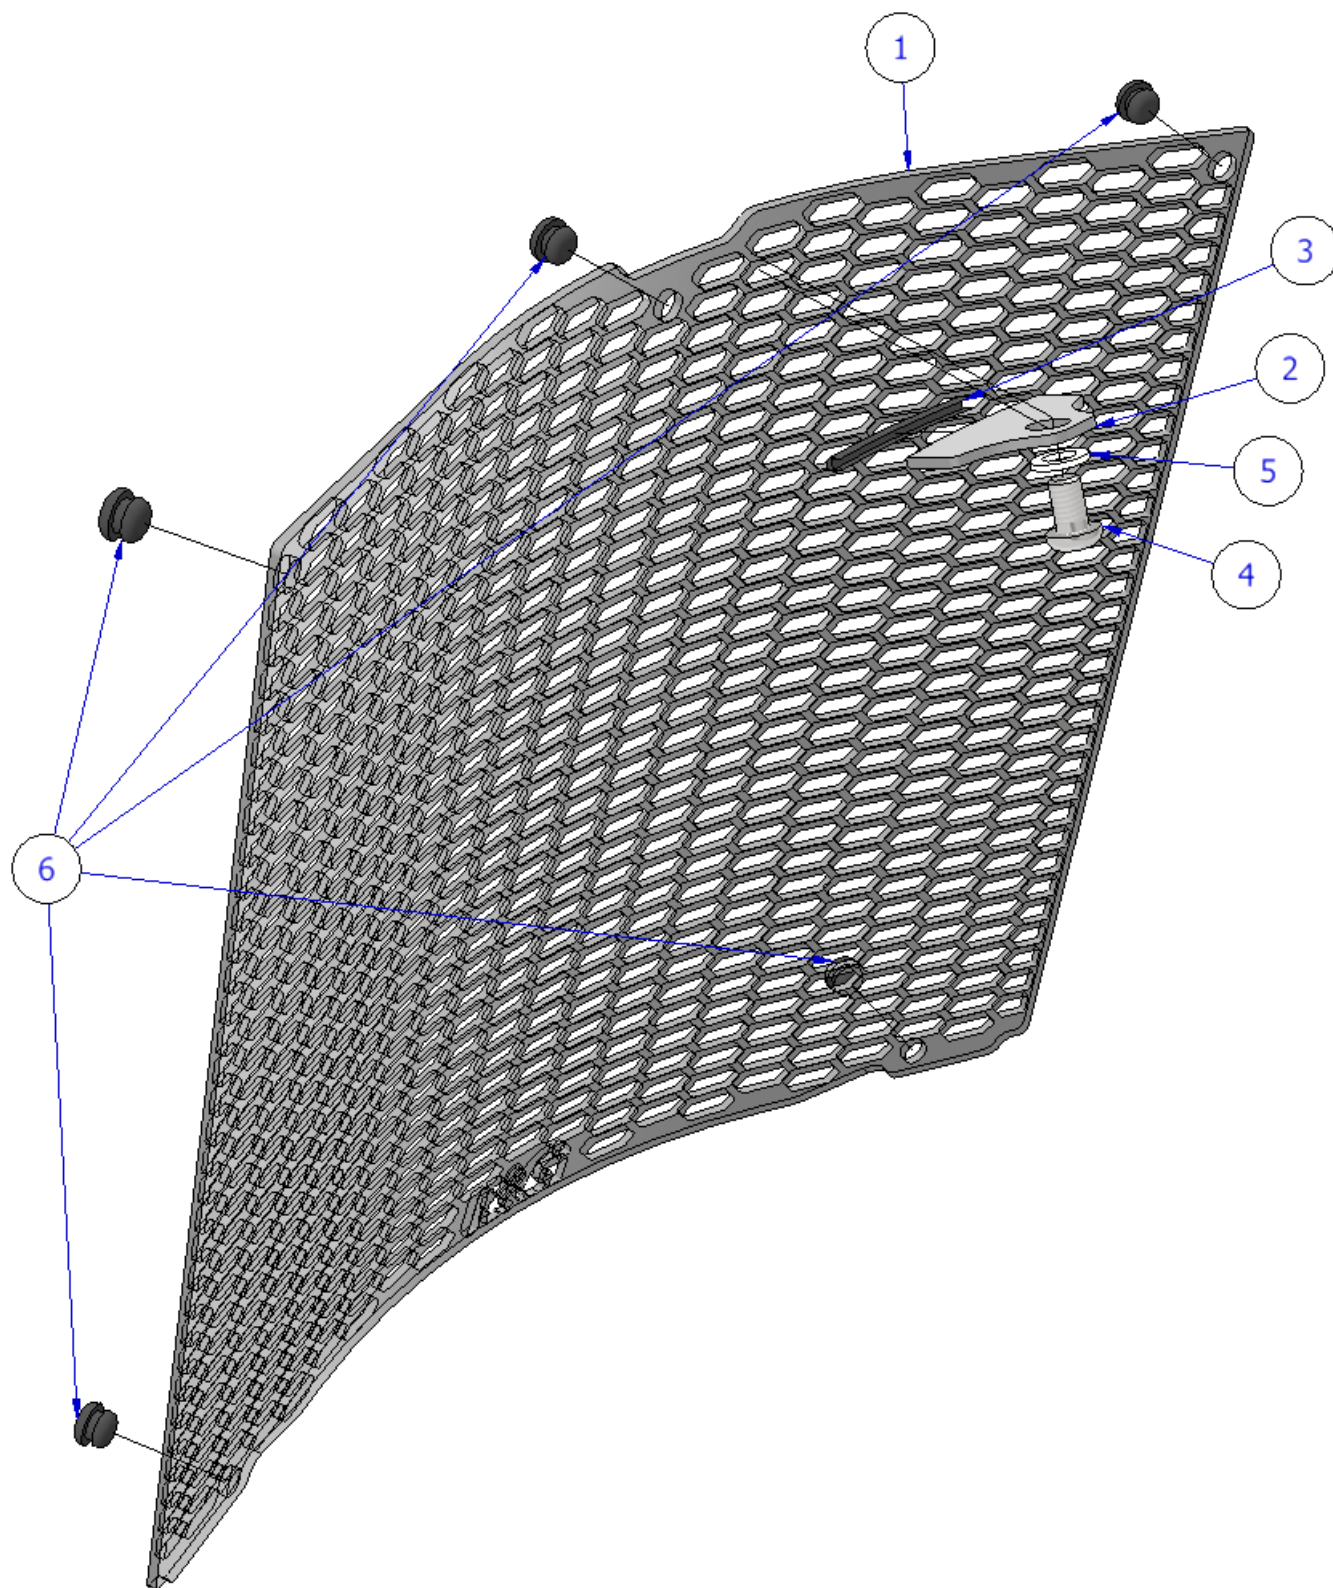




## FITTING PICTURES:

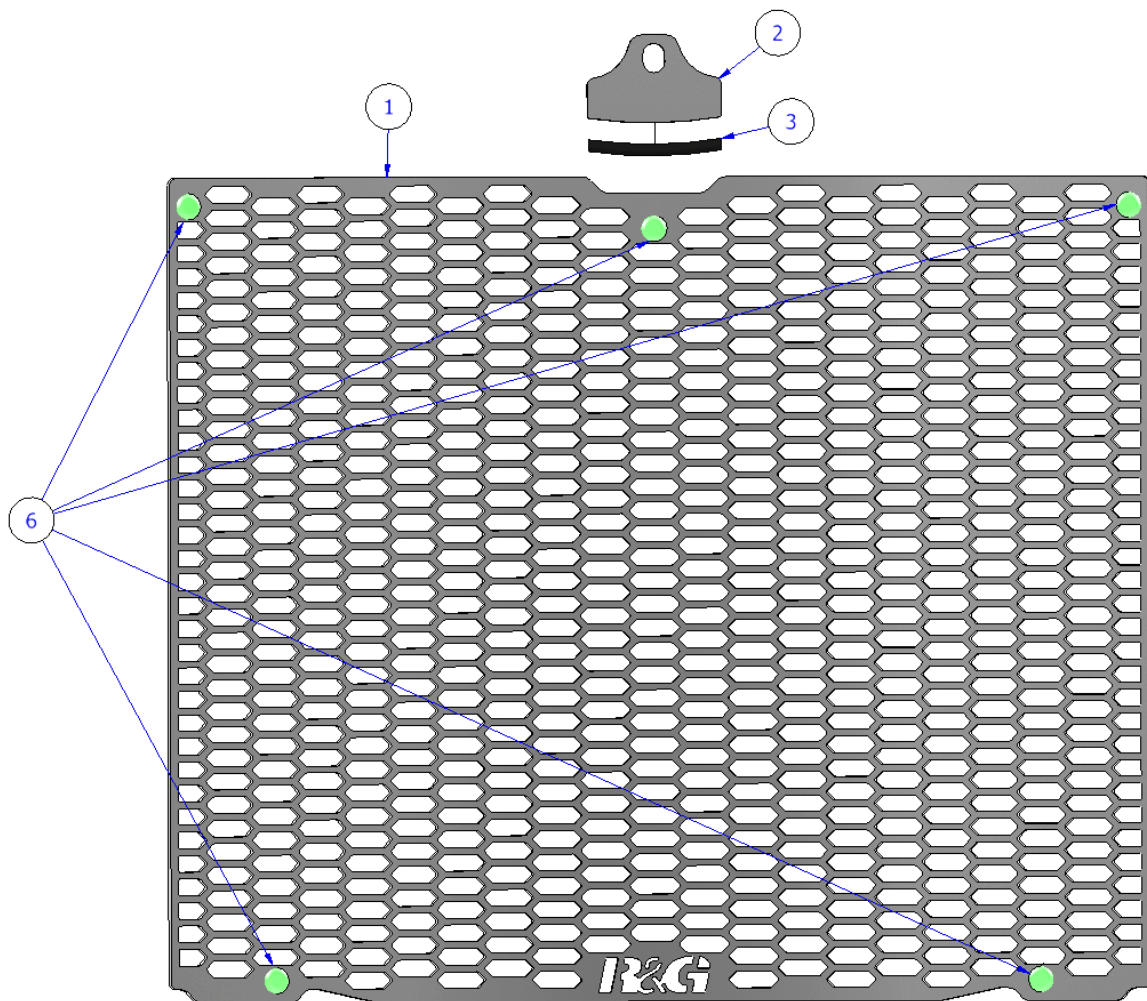


**Picture 1**



**Picture 2**

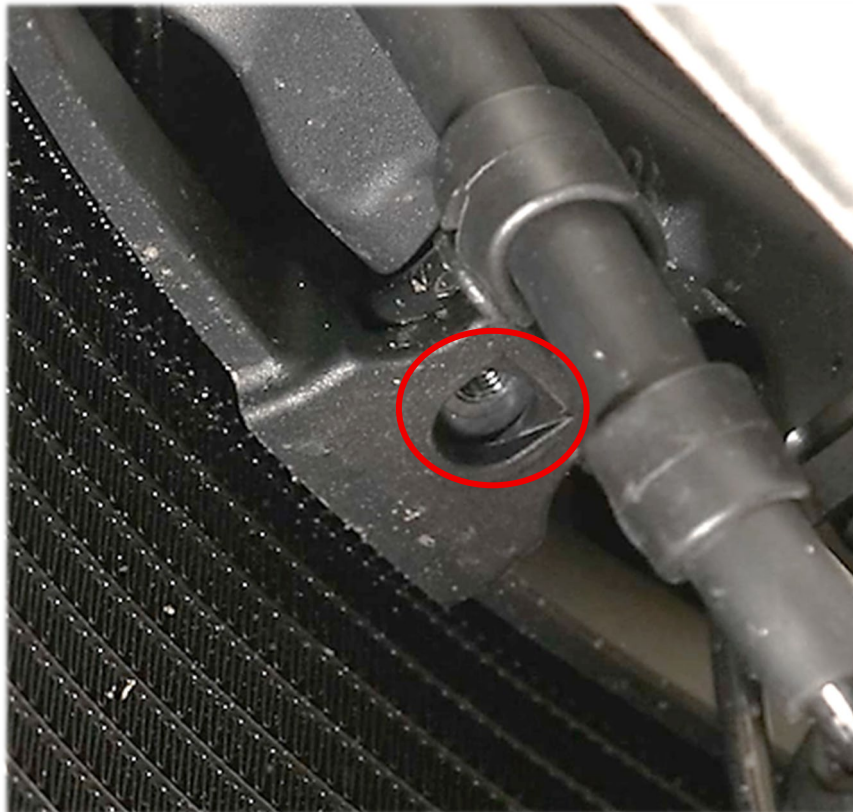

**Picture 3**

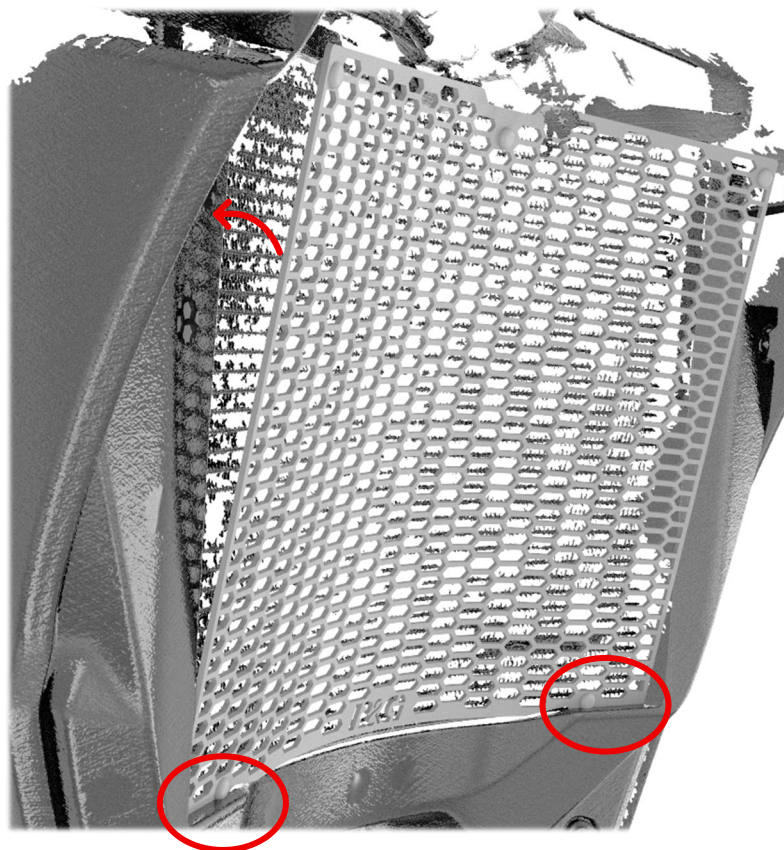

**Picture 4**



**Picture 5**

## **FITTING INSTRUCTIONS**

### **Assembly:**

- Firstly, carefully clean the radiator, being careful not to damage any of the fins.
- Prepare the radiator guard by inserting the 5x rubber bungs (**Item 6**) into the radiator guards. (**Picture 1**)

**Please note:** Fitting the bungs is much easier with the use of a 3mm allen/hex key as shown in **Picture 2**, place the bungs on the end of the allen key and carefully push through the holes.

- Then apply the rubber u-channel (**Item 3**) to the mounting plate as shown in **Picture 1** and trim to the length required.
- Remove the bolt circled red in **Picture 3**.
- Offer the guard up to the radiator, with the top end pitched forward to allow the bottom edge to come up higher than it would be when mounted.
- Then slot the two lower tabs (Circled in **Picture 4**) in behind the cowling.
- With the pre-prepared mounting plate (**Item 2**), bolt (**Item 4**) and washer (**Item 5**) close to hand, rotate the top edge up until it sits nicely into the radiator shroud (flush against the radiator).
- Then offer up the mounting plate with the bolt and washer already through it into the threaded hole of the bolt you removed earlier.
- Fully tighten the bolt making sure the bottom tabs stay behind the cowling while you do so.
- If any un-desired movement occurs the remaining rubber u-channel can be fitted around the perimeter of the guard to reduce this.

ISSUE 1 – 04/08/2025 (TB)

Racing Technique Ltd T/A R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)

**CONSUMER NOTICE**

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

**R&G RACING RETURNS POLICY (NON-FAULTY GOODS)**

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



## **NOTICE DE MONTAGE POUR RAD0375PRO**



**CE KIT CONTIENT LES ARTICLES ILLUSTRÉS ET ÉTIQUETES SUR LA PAGE.**

CERTAINES PARTIES PEUVENT ÊTRE PRÉSENTES UNIQUEMENT POUR LA CLARTÉ DES INSTRUCTIONS.

NE PAS PROCÉDER AU MONTAGE TANT QUE VOUS N'ÊTES PAS SÛR QUE TOUTES LES PIÈCES SOIENT PRÉSENTES.

**VEUILLEZ LIRE TOUTES LES INSTRUCTIONS AVANT DE CONTINUER.**

**EN CAS DE DOUTE LORS DU MONTAGE DE NOS PRODUITS, CONSULTEZ UN DE NOS  
REVENDEURS OU FAITES APPEL À UN TECHNICIEN QUALIFIÉ.**

VEUILLEZ NOTER QUE LA FAÇON DONT LE KIT EST EMBALLÉ NE REPRÉSENTE PAS NECESSAIREMENT LA MANIÈRE DE  
LE MONTER SUR LA MOTO.

SI DES RONDELLES EN CAOUTCHOUC SONT UTILISÉES POUR MAINTENIR LES COMPOSANTS SUR LES BOULONS,  
ELLES PEUVENT ÊTRE JETÉES.

**NOTICE DISPONIBLE AU TÉLÉCHARGEMENT SUR :**

[WWW.RG-RACING.COM](http://WWW.RG-RACING.COM)




| <b><u>OUTILS REQUIS</u></b>                                                           | <b><u>VALEURS DE SERRAGE</u></b>                                                                                      |
|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• CLÉS ALLEN</li> <li>• COUPE CÂBLE</li> </ul> | M4 BOULON = 8Nm<br>M5 BOULON = 12Nm<br>M6 BOULON = 15Nm<br>M8 BOULON = 20Nm<br>M10 BOULON = 40Nm<br>M12 BOULON = 40Nm |

### **LÉGENDE**

| <b>ARTICLE NO.</b> | <b>DESCRIPTION</b>                           | <b>QTÉ</b> |
|--------------------|----------------------------------------------|------------|
| ARTICLE 1          | RAD0375PRO PROTECTION RADIATEUR CÔTÉ GAUCHE  | 1          |
| ARTICLE 2          | PLAQUE DE MONTAGE                            | 1          |
| ARTICLE 3          | 200mm LONGUEUR DU PROFILÉ EN U EN CAOUTCHOUC | 1          |
| ARTICLE 4          | 12mm BOULON                                  | 1          |
| ARTICLE 5          | RONDELLE                                     | 1          |
| ARTICLE 6          | BOUCHON EN CAOUTCHOUC                        | 5          |


### **SCHÉMA DE MONTAGE**

AVANT DE LA PROTECTION






## SCHÉMA D'ENSEMBLE

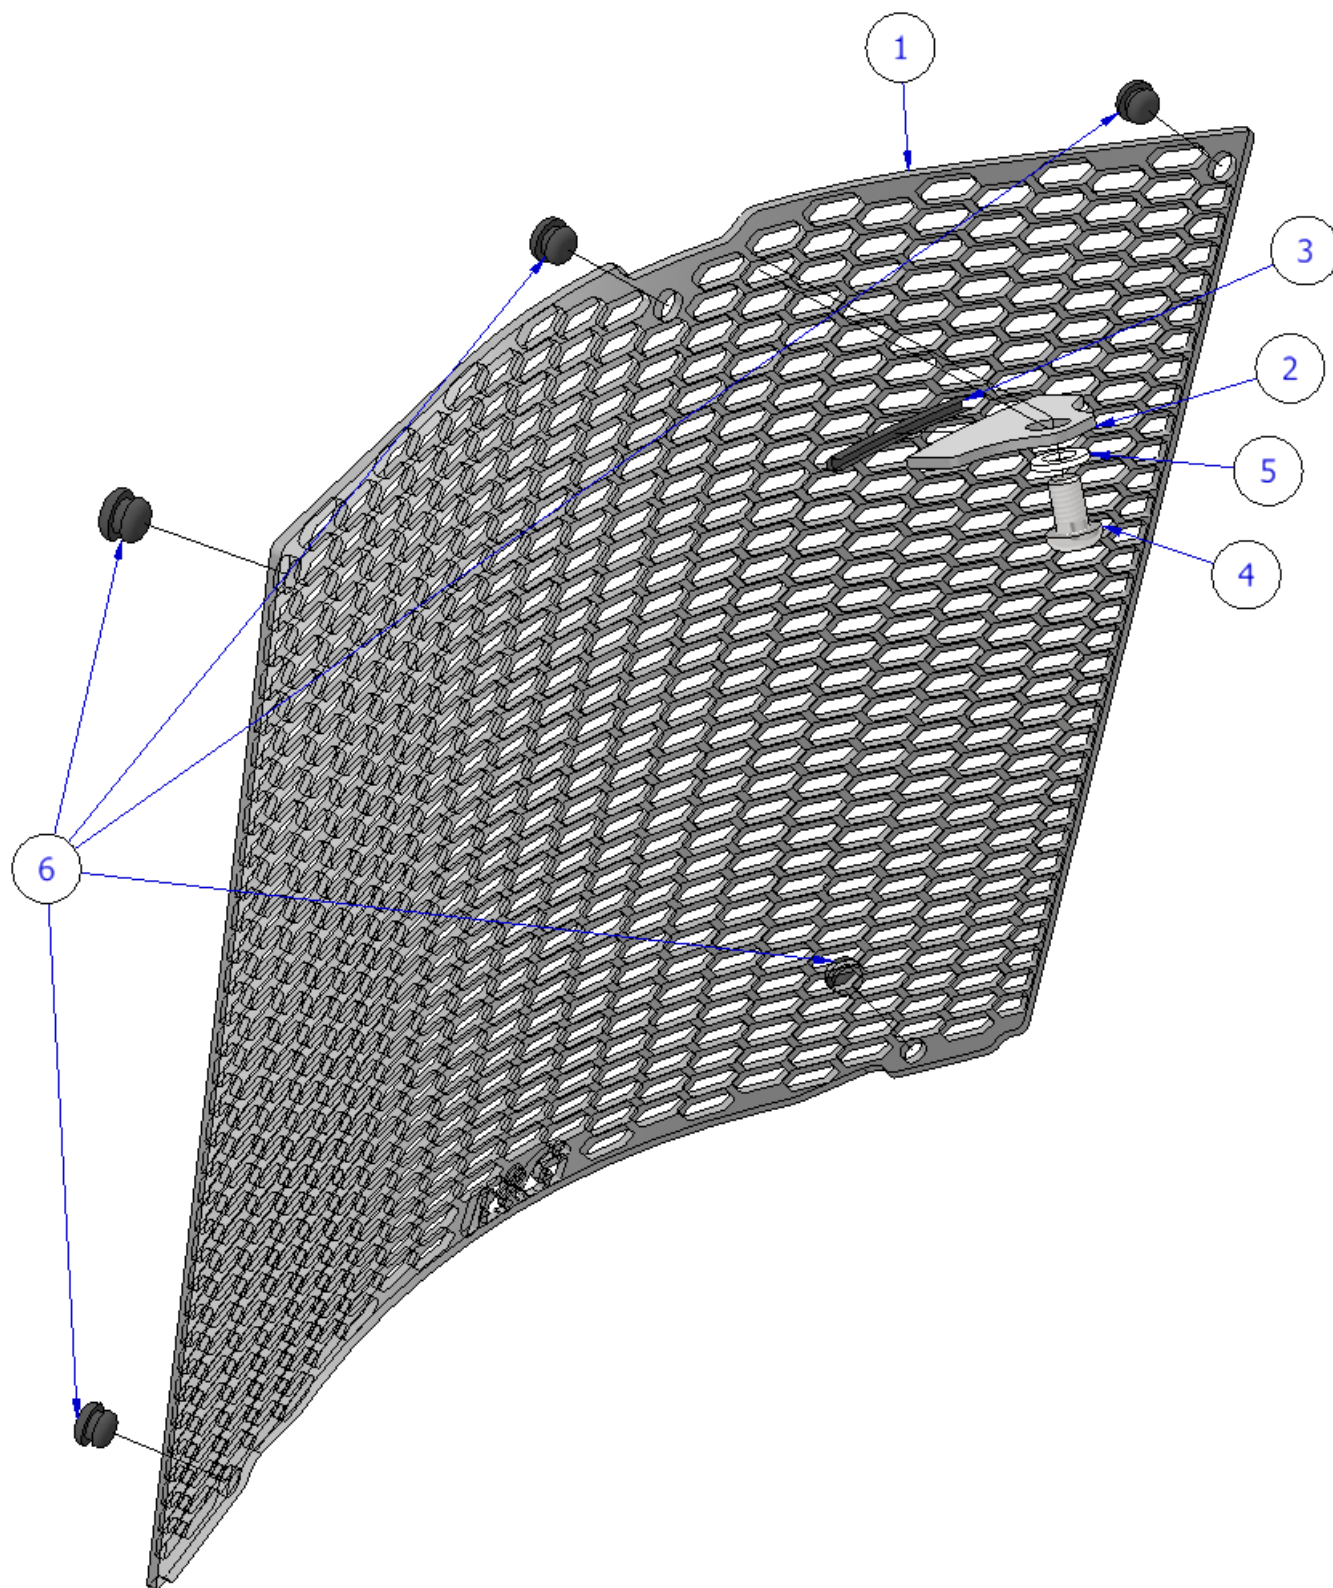





## PHOTOS DE MONTAGE :

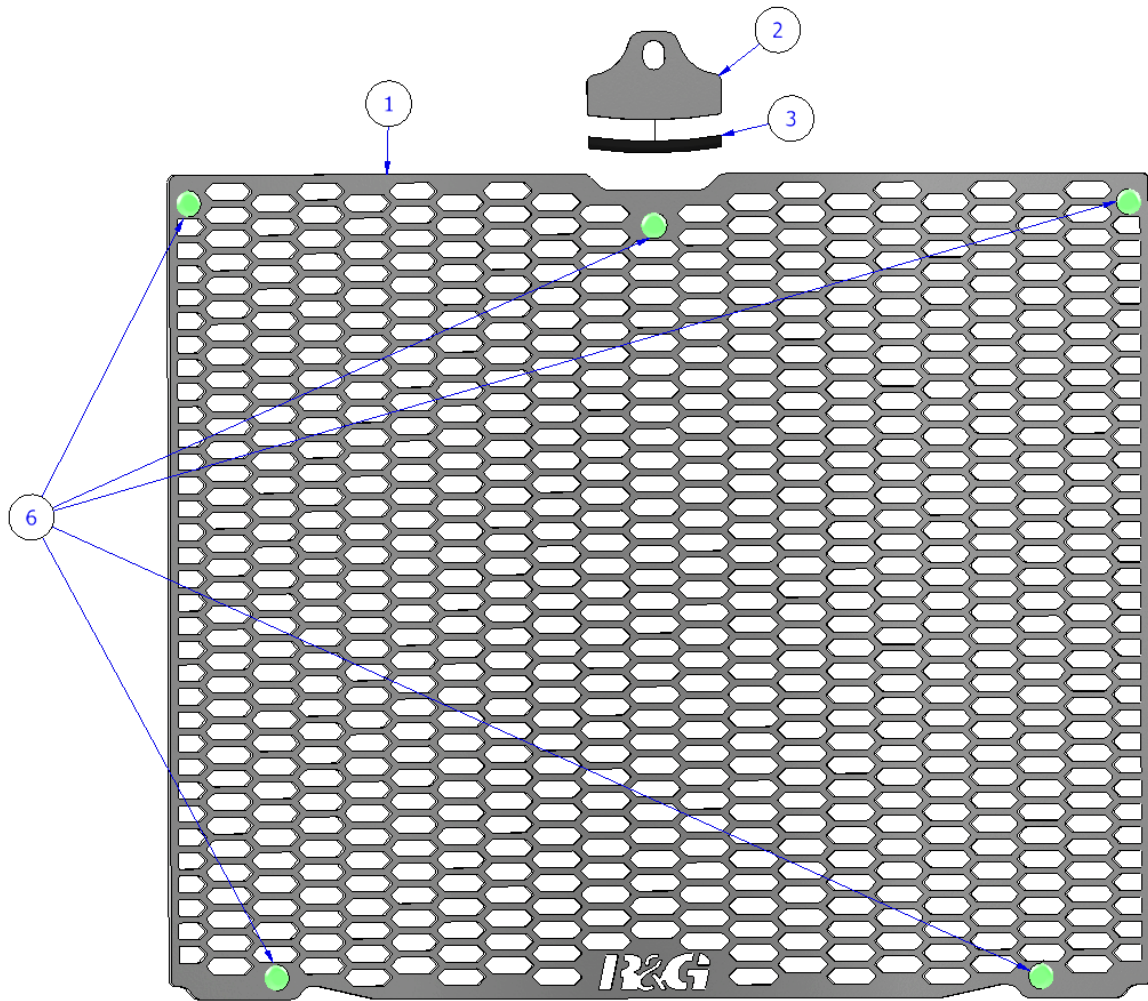


**Photo 1**

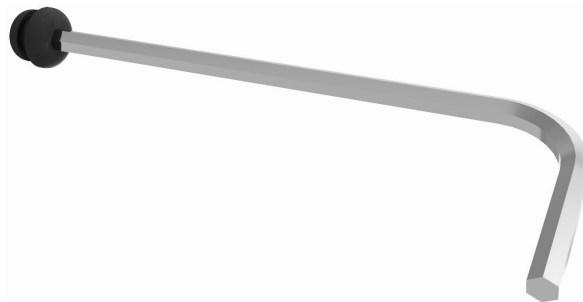

**Photo 2**

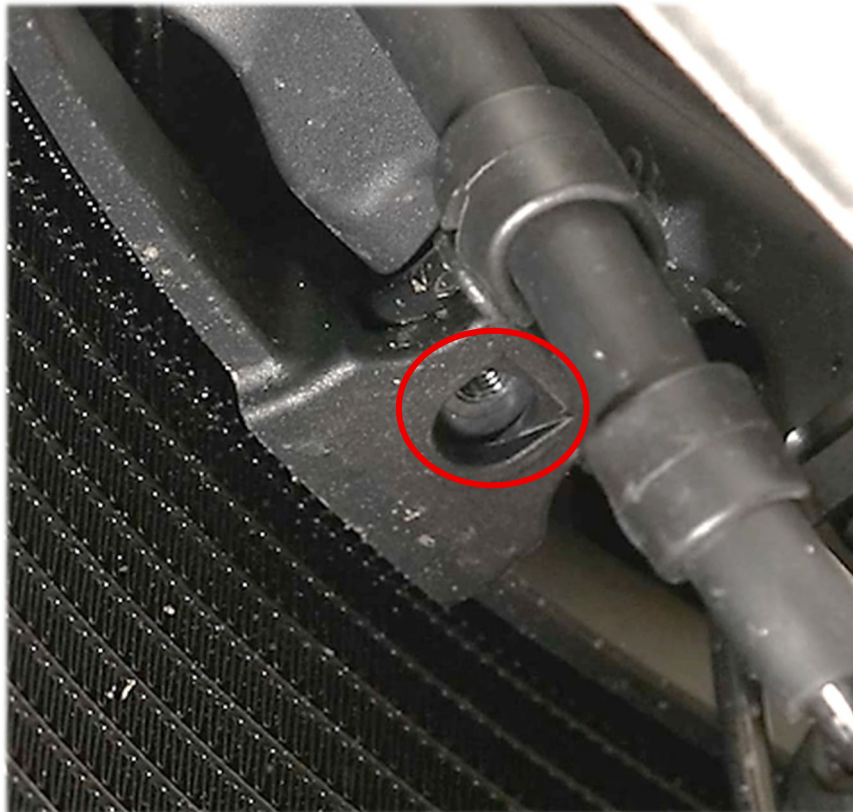

**Photo 3**

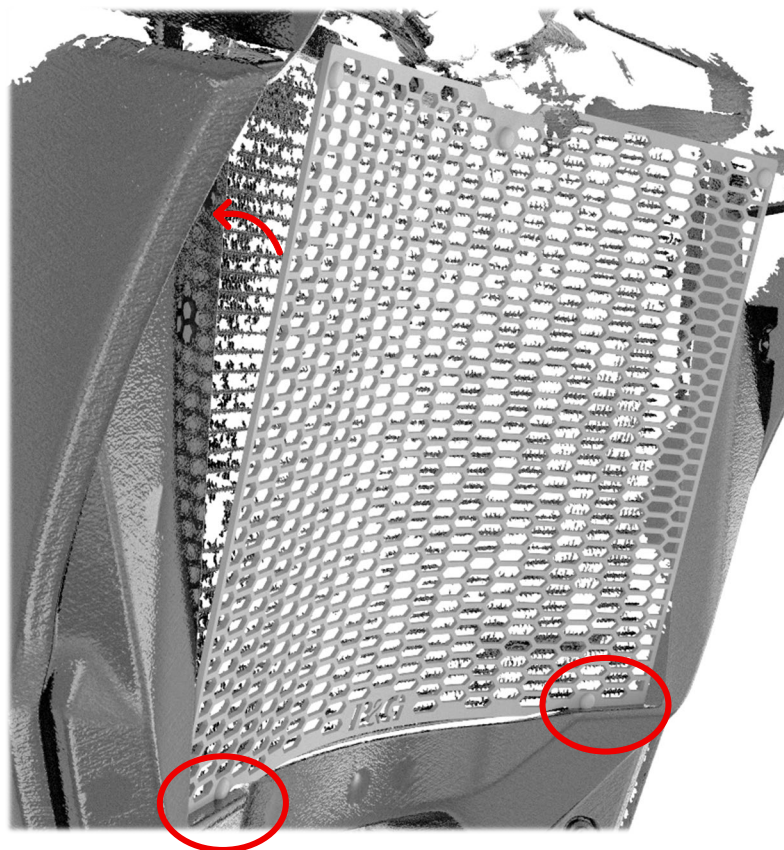

**Photo 4**

**Photo 5**

## **NOTICE DE MONTAGE**

### **Assemblage :**

- Tout d'abord, nettoyez soigneusement le radiateur en veillant à ne pas endommager les ailettes.
- Préparez la protection radiateur en insérant les 5 bouchons en caoutchouc (article 6) dans les protections (Photo 1).

**Note :** *Le montage des bouchons est beaucoup plus facile avec l'utilisation d'une clé Allen/hexagonale de 3 mm comme indiqué sur l'image 2, placez les bouchons à l'extrémité de la clé Allen et poussez soigneusement à travers les trous.*

- Appliquez ensuite le profilé en U en caoutchouc (article 3) sur la plaque de montage, comme illustré sur la photo 1, et coupez-le à la longueur souhaitée.
- Retirez le boulon entouré en rouge sur la photo 3.
- Placez la protection contre le radiateur, l'extrémité supérieure inclinée vers l'avant afin que le bord inférieur soit plus haut qu'une fois montée.
- Insérez ensuite les deux languettes inférieures (entourées sur la photo 4) derrière le capot.
- Une fois la plaque de montage (article 2), le boulon (article 4) et la rondelle (article 5) préparés à portée de main, faites pivoter le bord supérieur vers le haut jusqu'à ce qu'il soit bien en place dans le carénage du radiateur (à fleur du radiateur).
- Insérez ensuite la plaque de montage, le boulon et la rondelle déjà insérés, dans le trou fileté du boulon retiré précédemment.
- Serrez complètement le boulon en veillant à ce que les languettes inférieures restent derrière le capot.
- En cas de mouvement indésirable, le profilé en U en caoutchouc restant peut être

Racing Technique Ltd T/A R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)



installé sur le périmètre de la protection pour le réduire.

ISSUE 1 – 04/08/2025 (TB)

#### **CONSUMER NOTICE**

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

#### **R&G RACING RETURNS POLICY (NON-FAULTY GOODS)**

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.