




**FITTING INSTRUCTIONS FOR TP0020BK FOOTBOARD SLIDERS**  
**YAMAHA TRICITY '14-**



**THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED BELOW.**  
**DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.**

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike.

THE PARTS SHOWN MAY BE REPRESENTATIVE ONLY (FOR CLARITY OF INSTRUCTIONS ONLY).

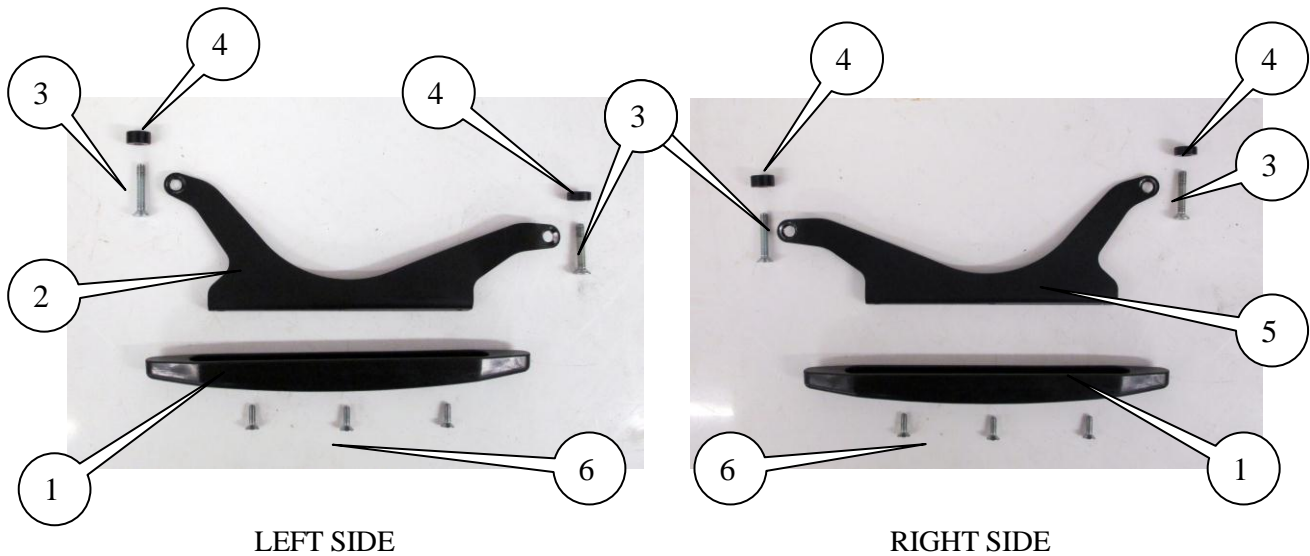

**LEGEND**

ITEM 1 = SLIDER (SL0007) (x2).

ITEM 2 = MOUNTING PLATE LEFT SIDE (MP0132) (x1).

ITEM 3 = M6x35mm LONG COUNTERSUNK BOLTS (x4).

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)



ITEM 4 = SPACER (S0848) 13mm LONG (x2).

ITEM 5 = MOUNTING PLATE RIGHT SIDE (MP0133) (x1).

ITEM 6 = M5x12mm LONG COUNTERSUNK BOLTS (x6).

Please note that in cases where kits are packed with rubber washers holding the components onto the bolt – *the rubber washers should be thrown away!*

#### **TOOLS REQUIRED**

- Set of metric Allen keys to include 3 & 4mm A/F sizes.
- 10mm Socket and wrench.



PICTURE 1



PICTURE 2



PICTURE 3



PICTURE 4



PICTURE 5

### **FITTING INSTRUCTIONS**

- To fit the left side, remove the two rubber covers in the recess holes in order to access the bolts.
- Remove the two 10mm bolts that are now accessible, as shown in picture 1.
- On the scooter, position one 14mm long spacer (item 4) in the rear recess and one 14mm long spacer (item 4) in the front mount, ensuring both spacers have the end with the larger chamfer facing upwards, as shown in picture 2.
- Take the left side mounting plate (item 2) and fit the slider (item 1) using three of the M5 countersunk bolts (item 6). Fit the bolts through the slider and screw into the mounting plate and tighten, as shown in picture 3.
- Offer the R&G footboard slider assembly into position and insert the two M6 x 35mm long countersunk bolts (item 3) through the mounting plate and through the spacers, before tightening onto the scooter, as shown in picture 4 & 5.
- Ensure both bolts are tightened evenly.
- Place the reflective bubble stickers into recesses to cover the bolt heads.
- To fit the right side, follow the same procedure as above.

ISSUE 1 19/01/2015 (AR)

### **CONSUMER NOTICE**

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

### **R&G RACING RETURNS POLICY (NON-FAULTY GOODS)**

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)



P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.




**INSTRUCTIONS DE MONTAGE POUR TP0020BK SLIDERS REPOSE PIED**  
**YAMAHA TRICITY '14-**



LE KIT CONTIENT LES ARTICLES EXPOSES CI-DESSOUS, VERIFIER QUE TOUTES LES PIECES SOIENT PRESENTES AVANT DE PROCEDER AU MONTAGE.

La façon dont le kit est emballé ne correspond pas forcément à la façon de monter les pièces sur la moto.

LES PARTIES PRESENTEES PEUVENT ETRE UNIQUEMENT REPRESENTATIVES (POUR LA CLARTE DES INSTRUCTIONS UNIQUEMENT).

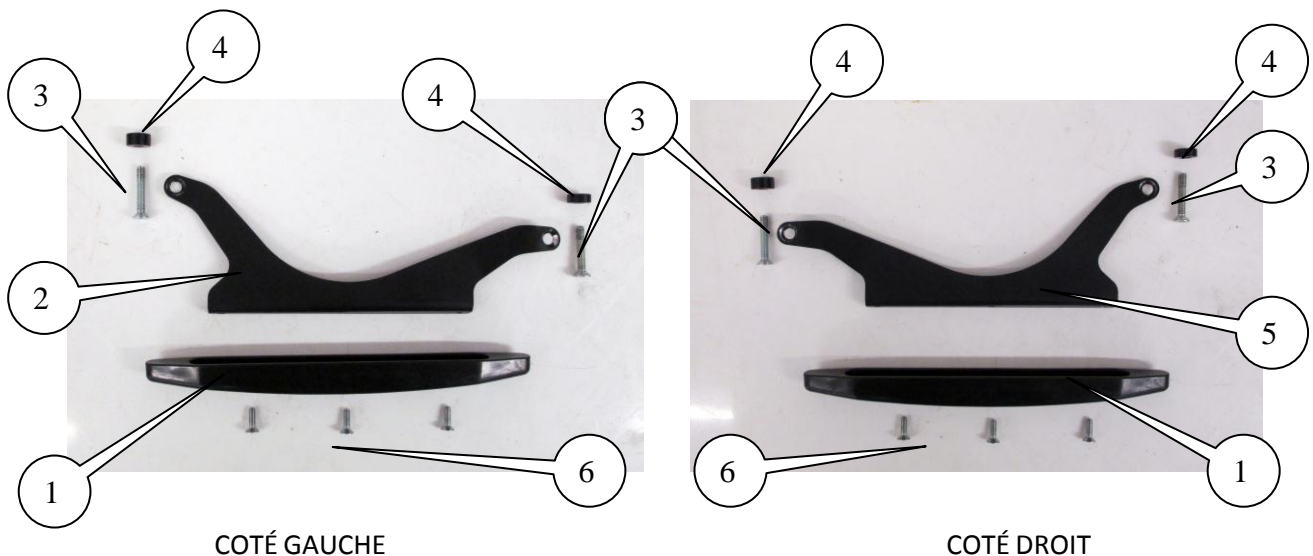



### **LEGENDE**

ARTICLE 1 = SLIDER (SL0007) (x2).

ARTICLE 2 = PLAQUE DE FIXATION COTÉ GAUCHE (MP0132) (x1).

ARTICLE 3 = M6x35mm BOULONS (x4).

ARTICLE 4 = ENTRETOISE (S0848) 13mm DE LONG (x2).

ARTICLE 5 = PLAQUE DE FIXATION COTÉ DROIT (MP0133) (x1).

ARTICLE 6 = M5x12mm BOULONS (x6).

Notez que si les kits sont emballés avec des rondelles en caoutchouc servant à tenir les composants, *ces rondelles doivent être jetées.*

### **OUTILS REQUIS**

- Jeu de clés Allen 3 & 4m
- Clé à douille 10mm.



PHOTO 1



PHOTO 2



PHOTO 3



PHOTO 4



PHOTO 5

#### **INSTRUCTIONS DE MONTAGE :**

- Pour l'installation coté gauche, enlever les deux caches en caoutchouc dans le creux des trous pour accéder aux boulons.
- Enlever les deux boulons 10mm qui sont à présent accessibles, voir photo 1.
- Sur le scooter, positionner l'entretoise 14mm (article 4) dans le creux arrière et une entretoise de 14mm (article 4) dans le support avant, en veillant à ce que les deux entretoises aient l'extrémité avec le plus grand chanfrein orienté vers le haut, voir photo 2.
- Prendre la plaque de fixation coté gauche (article 2) et monter le slider (article 1) en utilisant les 3 boulons M5 (article 6). Passer les boulons dans le slider puis visser dans la plaque de fixation avant de serrer, voir photo 3.
- Mettre l'assemblage de slider R&G en position puis insérer les deux boulons M6 x 35mm (article 3) dans la plaque de fixation puis dans les entretoises, avant de serrer sur le scooter, voir 4 & 5.
- Veiller à ce que les deux boulons soient serrés de façon identique
- Placer les stickers autocollants réfléchissants dans les creux pour cacher la tête des boulons.
- Pour l'installation du coté droit, suivre le même procédé utilisé ci-dessus..

ISSUE 1 19/01/2015 (AR)

#### **CONSUMER NOTICE**

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)



liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

**R&G RACING RETURNS POLICY (NON-FAULTY GOODS)**

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.