



FITTING INSTRUCTIONS FOR AR0035



THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED OVER PAGE.

SOME PARTS MAY BE SHOWN FOR CLARITY OF INSTRUCTIONS ONLY.

DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING.

**IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF OUR DEALERS
OR HAVE FITTED BY A QUALIFIED TECHNICIAN.**

PLEASE NOTE THAT THE WAY THE KIT IS PACKED DOES NOT NECESSARILY REPRESENT THE WAY OF
MOUNTING TO THE BIKE.

IN THE EVENT OF RUBBER WASHERS BEING USED TO HOLD COMPONENTS ONTO BOLTS,
THESE RUBBER WASHERS CAN BE THROWN AWAY.




<u>TOOLS REQUIRED</u>	<u>GENERAL TORQUE SETTINGS</u>
- METRIC A/F ALLEN TOOL SET - TORQUE WRENCH - METRIC SPANNER SET	M4 BOLT = 8Nm M5 BOLT = 12Nm M6 BOLT = 15Nm M8 BOLT = 20Nm M10 BOLT = 40Nm

LEGEND


ITEM NO.	DESCRIPTION	QTY
ITEM 1	LHS ADAPTOR PLATE	1
ITEM 2	RHS ADAPTOR PLATE	1
ITEM 3	ADVENTURE RACK PLATE	1
ITEM 4	52mm SPACER	2
ITEM 5	17mm SPACER	2
ITEM 6	9.5mm SPACER	4
ITEM 7	10mm SPACER	4
ITEM 8	M8 x 50mm BOLT	2
ITEM 9	M8 x 75mm BOLT	2
ITEM 10	M8 x 35mm BOLT	2
ITEM 11	M8 NUT	4
ITEM 12	M8 WASHER	8
ITEM 13	M8 x 65mm BOLT	2
ITEM 14	M8 x 90mm BOLT	2

FITTING PICTURE

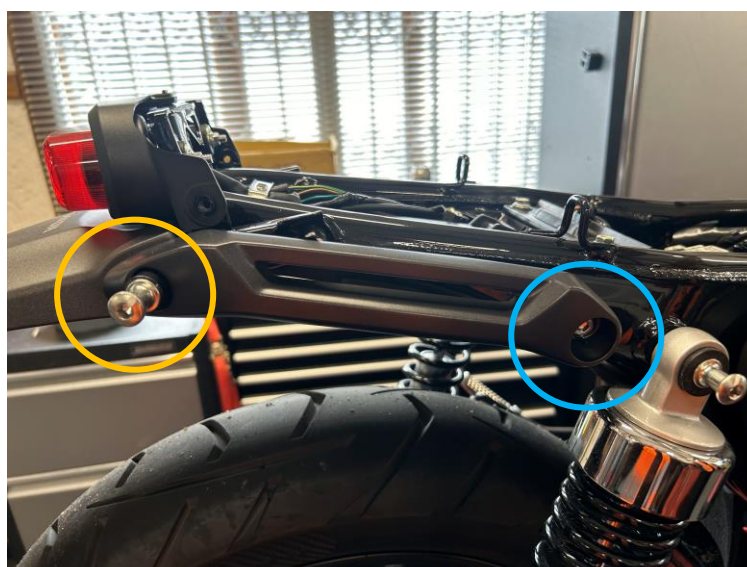




EXPLODED ASSEMBLY VIEW

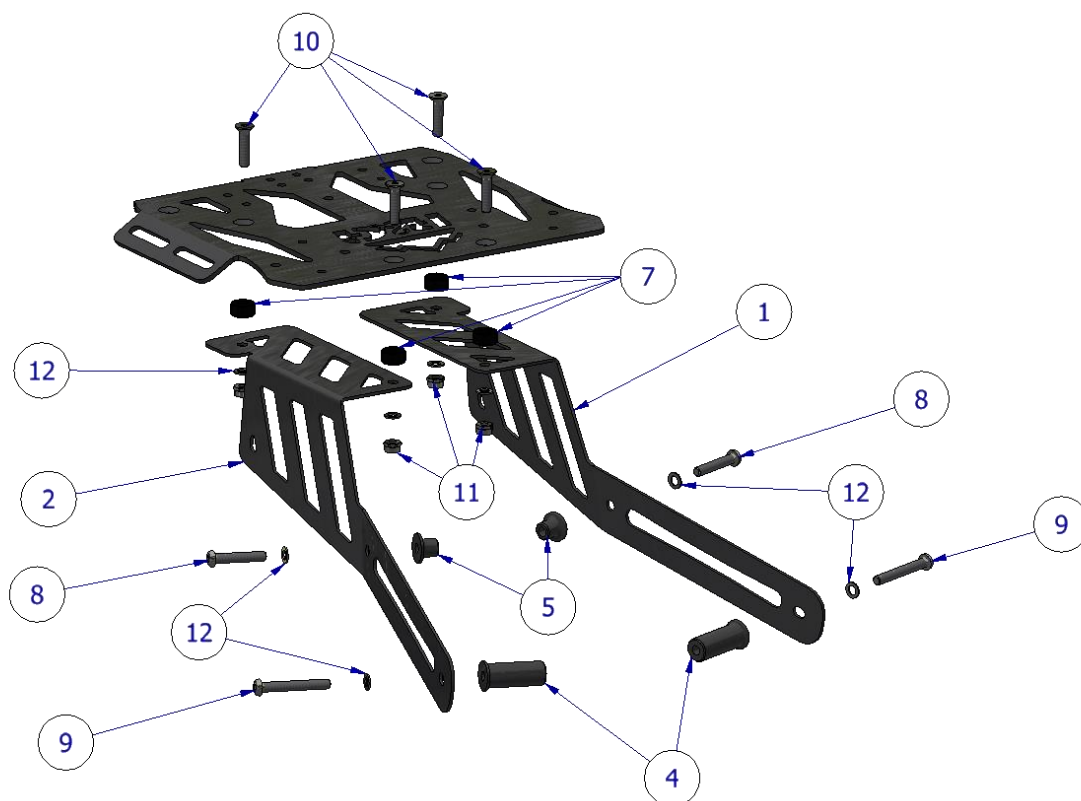

EXPLODED ASSEMBLY VIEW (WITH LSR0016)

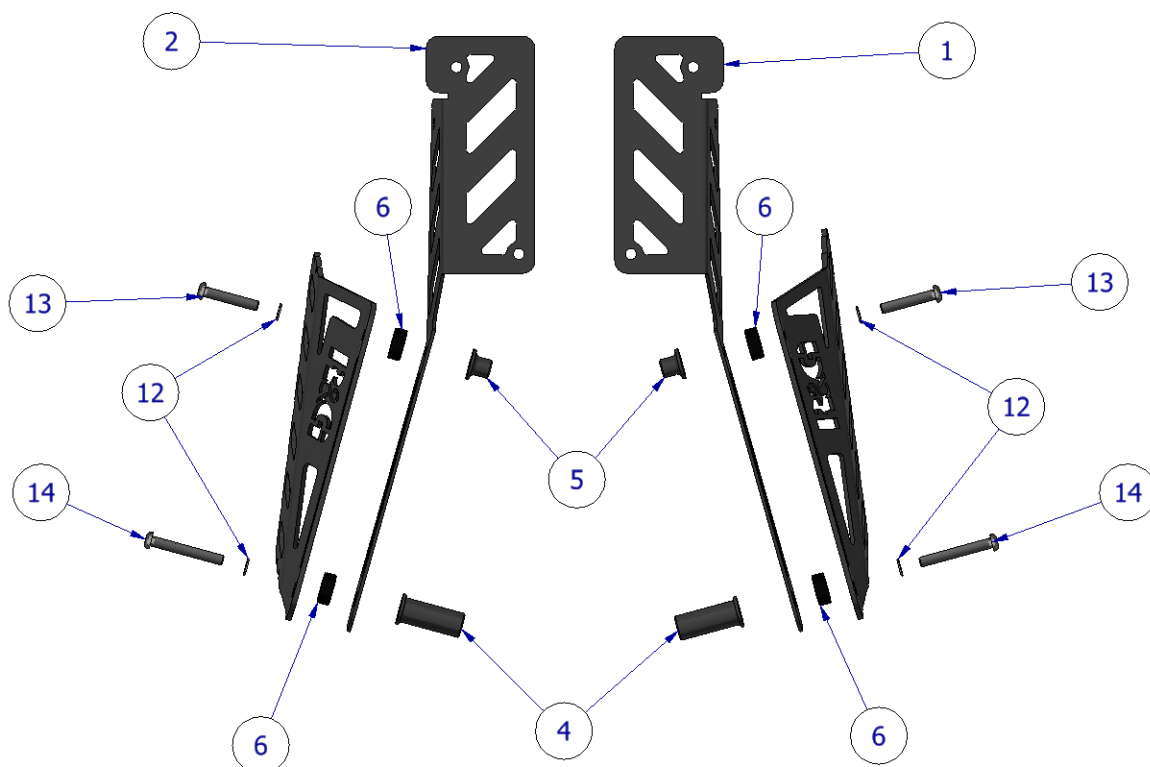



FITTING INSTRUCTIONS

- It is recommended that you begin with the RHS and move onto the LHS. Remove both bolts (and black spacer) circled in the **fitting picture**, being careful to hold the grey casting in place to not let it fall.
- Referring to the **EXPLODED ASSEMBLY VIEW**, secure the RHS to the bike (with the grey casting in place) using one 17mm spacer (**Item 5**), one 52mm spacer (**Item 4**), one 50mm bolt (**item 8**), one 75mm bolt (**Item 9**) and two washers (**Item 12**) as shown in the assembly view.
- If you have LSR0016 installed on the bike or are installing the kit at the same time as AR0035, please refer to the 2nd assembly diagram, and use the 9.5mm spacers (**Item 6**) and 65mm & 90mm bolts (**Items 13 & 14**) to space the LSR plates out from the AR plate as shown in the diagram.
- The 50mm bolt (65mm bolt if using LSR0016) should locate in the rear-most threaded hole (circled in orange in the **fitting picture**), and the 75mm bolt (90mm bolt if using LSR0016) should locate in the front threaded hole (circled in blue in the **fitting picture**).
- Repeat this process for the LHS & ensure all bolts are torqued to spec as listed on Page 2.
- To fit the universal plate, attach the universal plate to the adaptor plates using the M8 x 35mm countersunk bolts (**Item 10**), 10mm spacers (**Item 7**), M8 washers & nuts (**Items 11 & 12**) as shown in the assembly diagram.

Before riding with luggage fitted, ensure that all luggage is fully secured and will not contact any part of the chain or exhaust silencer during use. Failure to do so will result in damage to the luggage and bike and may cause serious injury or death.

PLEASE NOTE:

- To fit a SHAD Terra topbox to the rack you will need R&G kit ARSHAD0001
- GIVI Trekker Outback topbox requires SW-Motech part no. GPT.00.152.35400/B
- SW-Motech TRAX ION/ADV/EVO requires SW-Motech part no. GPT.00.152.35100/B

R&G Adventure Rack load capacity 10KG. Always check your motorcycles manufacturers guidelines before carrying any load.

ISSUE 1 – 08/04/2024 (MH)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods

Racing Technique Ltd t/A R&G
Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire, GU 34 3AQ
Tel: +44 (0)1420 89007 www.rg-racing.com Email: infor@rg-racing.com



must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

NOTICE DE MONTAGE AR0035



CE KIT CONTIENT LES ARTICLES ILLUSTRÉS ET ÉTIQUETES SUR LA PAGE.

CERTAINES PARTIES PEUVENT ÊTRE PRÉSENTES UNIQUEMENT POUR LA CLARTÉ DES INSTRUCTIONS.

NE PAS PROCÉDER AU MONTAGE TANT QUE VOUS N'ÊTES PAS SÛR QUE TOUTES LES PIÈCES SOIENT PRÉSENTES.

VEUILLEZ LIRE TOUTES LES INSTRUCTIONS AVANT DE CONTINUER.

EN CAS DE DOUTE LORS DU MONTAGE DE NOS PRODUITS, CONSULTEZ UN DE NOS REVENDEURS OU FAITES APPEL À UN TECHNICIEN QUALIFIÉ.

VEUILLEZ NOTER QUE LA FAÇON DONT LE KIT EST EMBALLÉ NE REPRÉSENTE PAS NECESSAIREMENT LA MANIÈRE DE LE MONTER SUR LA MOTO.

SI DES RONDELLES EN CAOUTCHOUC SONT UTILISÉES POUR MAINTENIR LES COMPOSANTS SUR LES BOULONS, ELLES PEUVENT ÊTRE JETÉES.

NOTICE DISPONIBLE AU TÉLÉCHARGEMENT SUR :

WWW.RG-RACING.COM

Racing Technique Ltd t/A R&G

Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire, GU 34 3AQ

Tel: +44 (0)1420 89007 www.rg-racing.com Email: infor@rg-racing.com




<u>OUTILS REQUIS</u>	<u>VALEURS DE SERRAGE</u>
• CLÉS ALLEN • CLÉ DYNAMOMÉTRIQUE • CLÉ À MOLETTE	M4 BOULON = 8Nm M5 BOULON = 12Nm M6 BOULON = 15Nm M8 BOULON = 20Nm M10 BOULON = 40Nm M12 BOULON = 40Nm

LÉGENDE


ARTICLE NO.	DESCRIPTION	QTÉ
ARTICLE 1	SUPPORT ADAPTATEUR CÔTÉ GAUCHE	1
ARTICLE 2	SUPPORT ADAPTATEUR CÔTÉ DROIT	1
ARTICLE 3	PLAQUE DE RACK AVENTURE	1
ARTICLE 4	52mm ENTRETOISE	2
ARTICLE 5	17mm ENTRETOISE	2
ARTICLE 6	9.5mm ENTRETOISE	4
ARTICLE 7	10mm ENTRETOISE	4
ARTICLE 8	M8 x 50mm BOULON	2
ARTICLE 9	M8 x 75mm BOULON	2
ARTICLE 10	M8 x 35mm BOULON	2
ARTICLE 11	M8 ÉCROU	4
ARTICLE 12	M8 RONDELLE	8
ARTICLE 13	M8 x 65mm BOULON	2
ARTICLE 14	M8 x 90mm BOULON	2

PHOTO DE MONTAGE

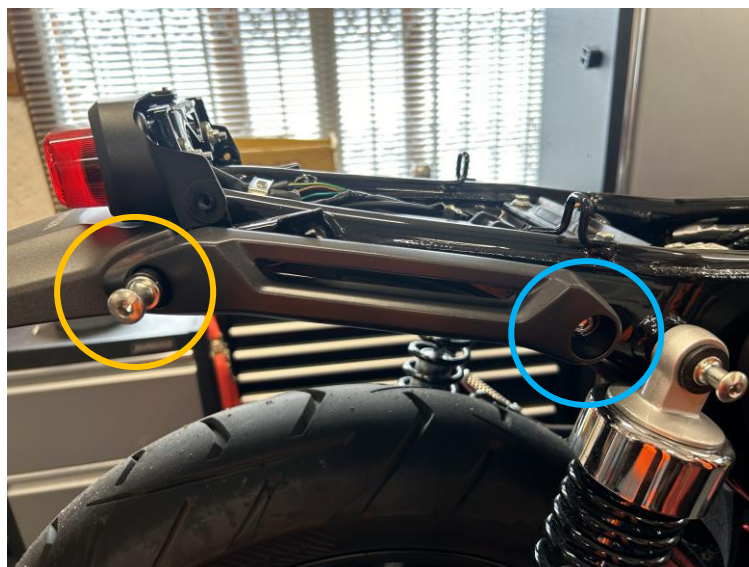




VUE D'ENSEMBLE

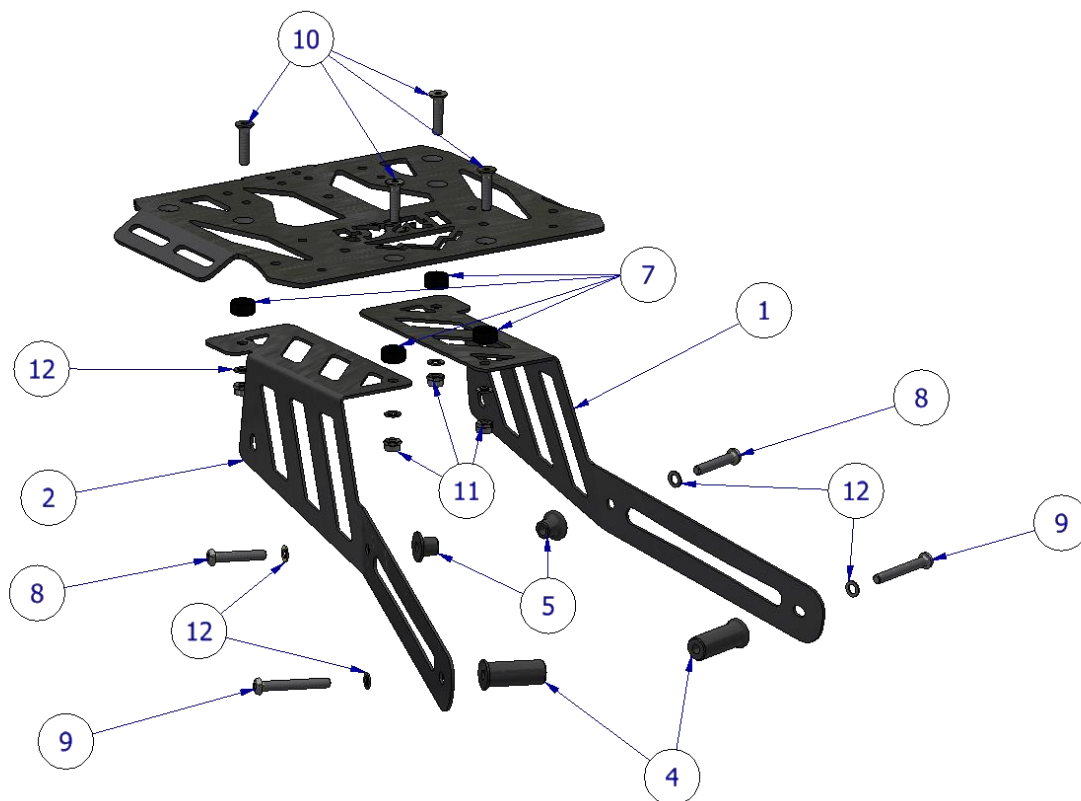

E VUE D'ENSEMBLE (AVEC LSR0016)

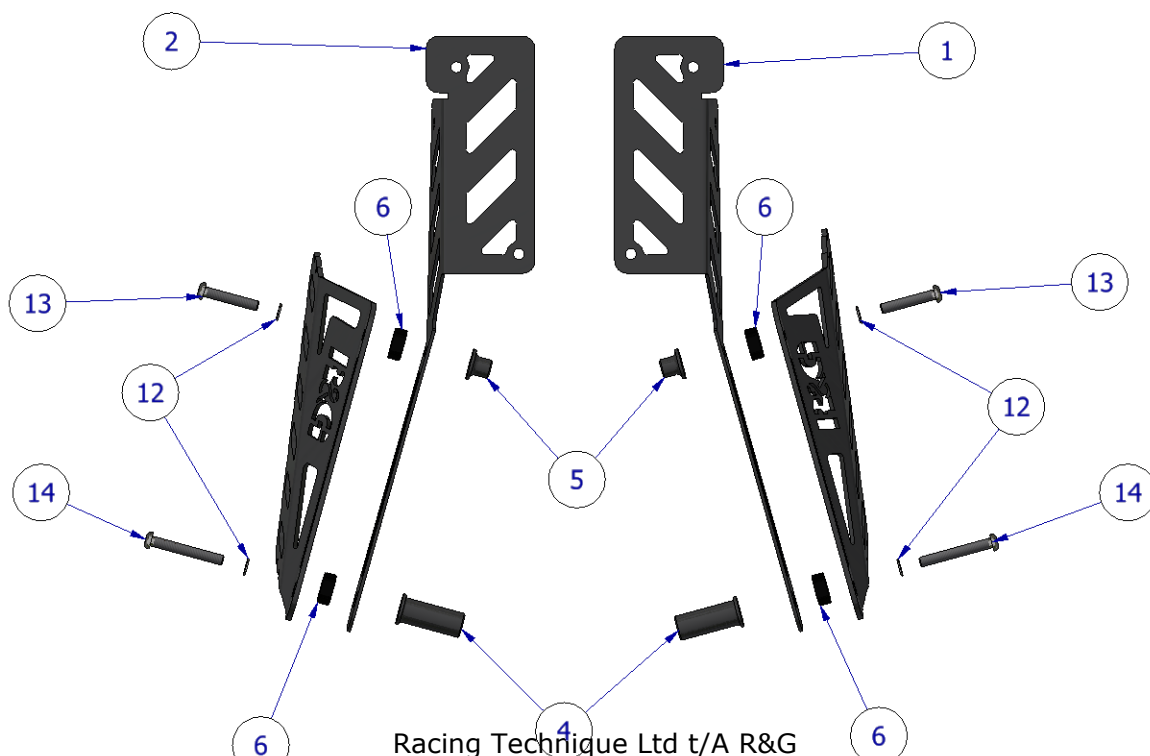



NOTICE DE MONTAGE

- Il est recommandé de commencer par le côté droit, puis de passer au côté gauche. Retirez les deux boulons (et l'entretoise noire) entourés sur la photo de montage, en veillant à maintenir le moulage gris en place pour éviter qu'il ne tombe.
- En vous référant à la VUE DÉTAILLÉE DE L'ASSEMBLAGE, fixez le côté droit sur la moto (avec le moulage gris en place) à l'aide d'une entretoise de 17 mm (article 5), d'une entretoise de 52 mm (article 4), d'un boulon de 50 mm (article 8), d'un boulon de 75 mm (article 9) et de deux rondelles (article 12), comme indiqué sur la vue d'assemblage.
- Si le kit LSR0016 est installé sur votre moto ou si vous installez le kit en même temps que l'AR0035, veuillez vous référer au deuxième schéma de montage et utiliser les entretoises de 9,5 mm (article 6) et les boulons de 65 mm et 90 mm (articles 13 et 14) pour espacer les plaques LSR de la plaque AR, comme indiqué sur le schéma.
- Le boulon de 50 mm (65 mm si vous utilisez le LSR0016) doit se loger dans le trou fileté le plus à l'arrière (entouré en orange sur la photo de montage), et le boulon de 75 mm (90 mm si vous utilisez le LSR0016) doit se loger dans le trou fileté le plus à avancé (entouré en bleu sur la photo de montage).
- Répétez cette procédure du côté gauche et assurez-vous que tous les boulons soient serrés conformément aux spécifications de la page 2.
- Pour installer la plaque universelle, fixez-la aux plaques d'adaptation à l'aide des boulons à tête fraisée M8 x 35 mm (article 10), des entretoises de 10 mm (article 7), des rondelles et écrous M8 (articles 11 et 12), comme indiqué sur le schéma de montage..

Avant de rouler avec vos bagages, assurez-vous qu'ils soient bien fixés et qu'ils ne toucheront aucune partie de la chaîne ou du silencieux d'échappement pendant l'utilisation. Le non-respect de cette consigne pourrait endommager les bagages et la moto, et entraîner des blessures graves, voire mortelles..

NOTE :

- Pour installer un top-case SHAD Terra sur le porte-bagages, vous aurez besoin du kit R&G ARSHAD0001.
- Le top-case GIVI Trekker Outback nécessite la référence SW-Motech GPT.00.152.35400/B.
- Le top-case SW-Motech TRAX ION/ADV/EVO nécessite la référence SW-Motech GPT.00.152.35100/B.

Porte-bagages Adventure R&G : capacité de charge de 10 kg. Consultez toujours les instructions de votre moto avant de transporter une charge.

ISSUE 1 – 08/04/2024 (MH)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for

Racing Technique Ltd t/A R&G

Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire, GU 34 3AQ
Tel: +44 (0)1420 89007 www.rg-racing.com Email: infor@rg-racing.com



ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.