



FITTING INSTRUCTIONS FOR EH0106BK
EXHAUST HANGER
SUZUKI SV650/SV650X 2020-



THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED OVER PAGE.

SOME PARTS MAY BE SHOWN FOR CLARITY OF INSTRUCTIONS ONLY.

DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING.

**IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF OUR DEALERS
OR HAVE FITTED BY A QUALIFIED TECHNICIAN.**

PLEASE NOTE THAT THE WAY THE KIT IS PACKED DOES NOT NECESSARILY REPRESENT THE WAY OF
MOUNTING TO THE BIKE.

IN THE EVENT OF RUBBER WASHERS BEING USED TO HOLD COMPONENTS ONTO BOLTS,
THESE RUBBER WASHERS CAN BE THROWN AWAY.

DIGITAL COPIES OF THESE INSTRUCTIONS ARE AVAILABLE FROM:

WWW.RG-RACING.COM




<u>TOOLS REQUIRED</u>	<u>GENERAL TORQUE SETTINGS</u>
• 5mm A/F ALLEN TOOL • 13mm A/F SPANNER	M4 BOLT = 8Nm M5 BOLT = 12Nm M6 BOLT = 15Nm M8 BOLT = 20Nm M10 BOLT = 40Nm M12 BOLT = 40Nm

LEGEND

ITEM NO.	DESCRIPTION	QTY
ITEM 1	HB0106 EXHAUST HANGER	1
ITEM 2	M8 x 1.25 x 30.00mm BUTTON HEAD BOLT (UPPER MOUNT W/SPACER)	1
ITEM 3	M8 x 1.25 x 25.00mm BUTTON HEAD BOLT (UPPER MOUNTS W/OUT SPACER + SCORPION SILENCER LOWER MOUNTING)	3
ITEM 4	M8 x 1.25 x 20.00mm BUTTON HEAD BOLT (OEM SILENCER LOWER MOUNTING)	1
ITEM 5	S0919 7mm SPACER (UPPER MOUNT)	1
ITEM 6	M8 x 1.25 NYLOC NUT	1
ITEM 7	M8 WASHERS OD=19mm	4



EXPLODED ASSEMBLY VIEW

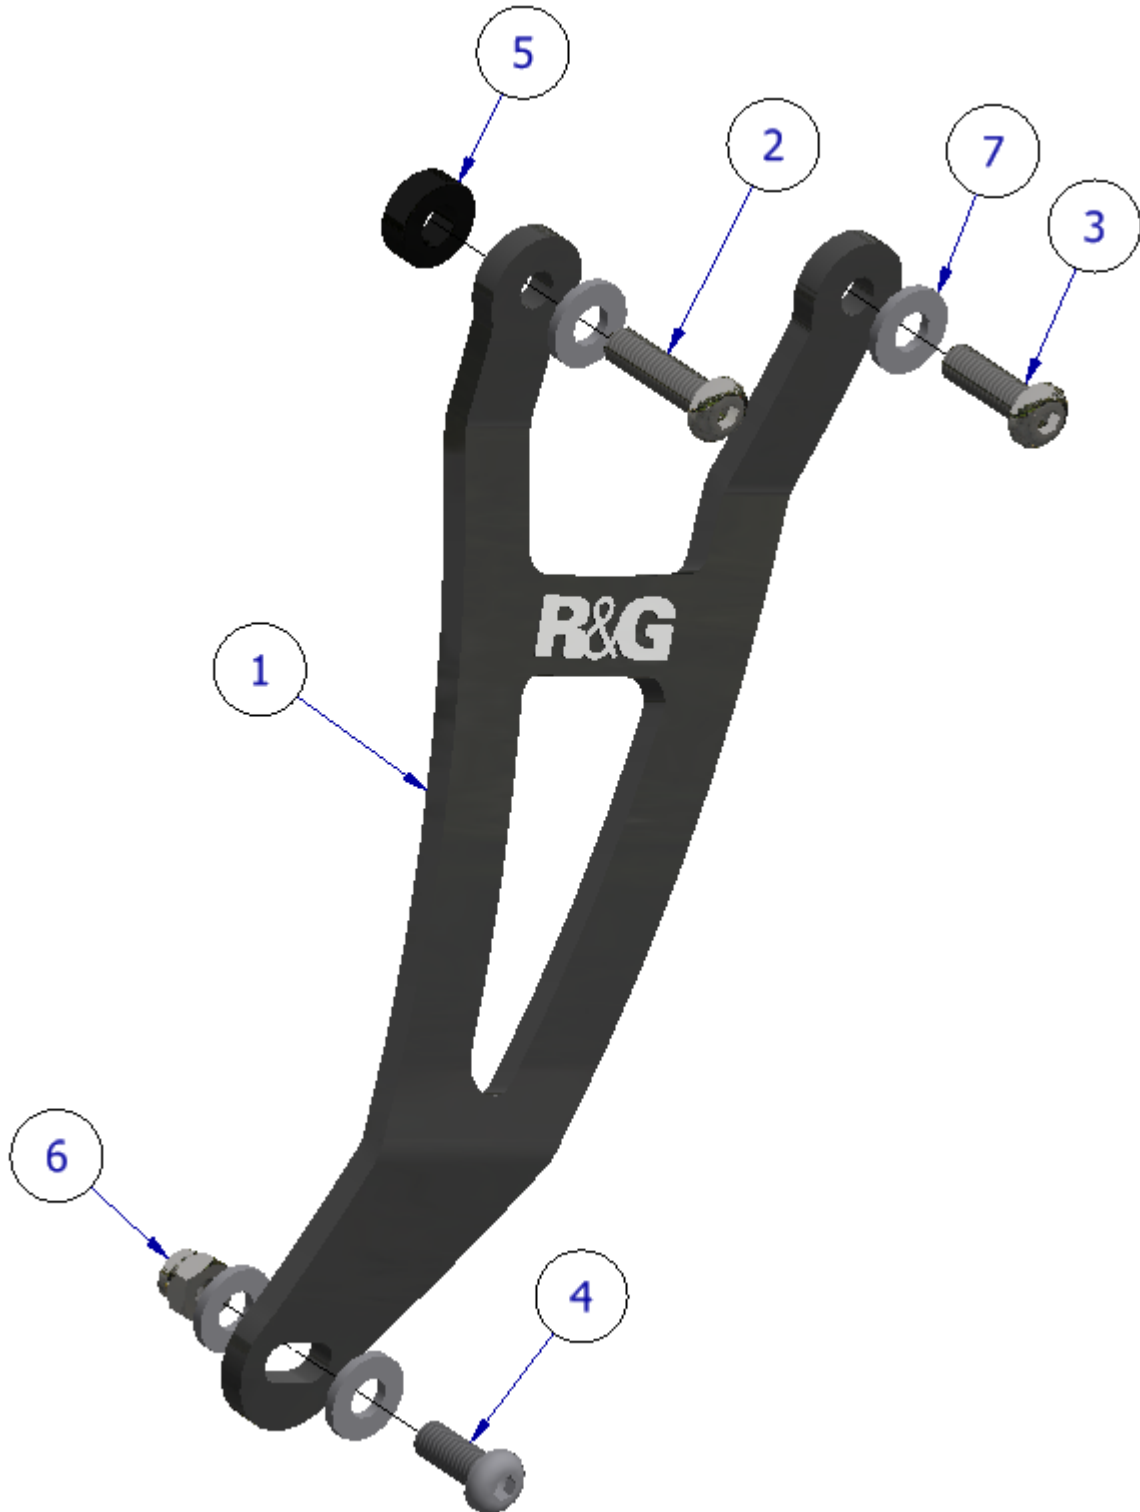



FITTING PICTURES



Picture 1



Picture 2



Picture 3



Picture 4



FITTING INSTRUCTIONS

- Using a 5mm Allen tool, remove the bolt securing the silencer to the OEM hanger, as shown in picture 1.
- Remove the upper bolts securing the OEM hanger, as shown in picture 2, then remove the hanger.
- Fit the new R&G exhaust hanger (**item 1**) – depending on model, the included spacer (**item 5**) will be required to be positioned between the frame and the bracket. Using a 5mm Allen tool, secure the upper mounts with the included M8 bolts (**item 2 – with spacer, item 3 – without spacer**) and washers (**item 7**), as shown in picture 3.
- Depending on the silencer fitted, secure the lower mount using either the 20mm M8 bolt (**item 4 – OEM silencer**) or the 25mm M8 bolt (**item 3 – Scorpion silencer**), washers (**item 7**) and nut (**item 6**), using a 5mm Allen tool and 13mm spanner as shown in picture 4.
- Ensure the exhaust silencer is securely held in place. After riding the bike, check the tightness of the bolts regularly (e.g. when cleaning the bike).

Please note that it is your responsibility to ensure that no part of the exhaust hanger or exhaust assembly fouls or comes into contact with other parts of the machine. Do not ride the motorcycle until this aspect has been verified and you have compressed the rear suspension (if appropriate to the design of the motorcycle) to test this thoroughly.

ISSUE 1 - 30/11/2020 (FB)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



NOTICE DE MONTAGE EH0106BK
SUPPORT D'ÉCHAPPEMENT
SUZUKI SV650/SV650X 2020-

CE KIT CONTIENT LES ARTICLES ILLUSTRÉS ET ÉTIQUETES SUR LA PAGE.

CERTAINES PARTIES PEUVENT ÊTRE PRÉSENTES UNIQUEMENT POUR LA CLARTÉ DES INSTRUCTIONS.

NE PAS PROCÉDER AU MONTAGE TANT QUE VOUS N'ÊTES PAS SÛR QUE TOUTES LES PIÈCES SOIENT PRÉSENTES.

VEUILLEZ LIRE TOUTES LES INSTRUCTIONS AVANT DE CONTINUER.

EN CAS DE DOUTE LORS DU MONTAGE DE NOS PRODUITS, CONSULTEZ UN DE NOS REVENDUEURS OU FAITES APPEL À UN TECHNICIEN QUALIFIÉ.

VEUILLEZ NOTER QUE LA FAÇON DONT LE KIT EST EMBALLÉ NE REPRÉSENTE PAS NECESSAIREMENT LA MANIÈRE DE LE MONTER SUR LA MOTO.

SI DES RONDELLES EN CAOUTCHOUC SONT UTILISÉES POUR MAINTENIR LES COMPOSANTS SUR LES BOULONS, ELLES PEUVENT ÊTRE JETÉES.

NOTICE DISPONIBLE AU TÉLÉCHARGEMENT SUR : WWW.RG-RACING.COM

<u>OUTILS REQUIS</u>	<u>VALEURS DE SERRAGE RECOMMANDÉES</u>
• CLÉ ALLEN 5mm • CLÉ À MOLETTE 13mm	M4 BOULON = 8Nm M5 BOULON = 12Nm M6 BOULON = 15Nm M8 BOULON = 20Nm M10 BOULON = 40Nm M12 BOULON = 40Nm

Racing Technique Ltd T/A R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



LÉGENDE

ARTICLE NO.	DESCRIPTION	QTÉ
ARTICLE 1	HB0106 SUPPORT D'ÉCHAPPEMENT	1
ARTICLE 2	M8 x 1.25 x 30.00mm BOULON (ENTRETOISE SUPPORT SUPÉRIEUR)	1
ARTICLE 3	M8 x 1.25 x 25.00mm BOULON (ENTRETOISE SUPPORTS SUPÉRIEURS + ENTRETOISE SUPPORT SILENCIEUX INFÉRIEUR SCORPION)	3
ARTICLE 4	M8 x 1.25 x 20.00mm BOULON (SUPPORT INFÉRIEUR DE SILENCIEUX D'ORIGINE)	1
ARTICLE 5	S0919 7mm ENTRETOISE (SUPPORT SUPÉRIEUR)	1
ARTICLE 6	M8 x 1.25 ÉCROU	1
ARTICLE 7	M8 RONDELLES OD=19mm	4

NOTICE DE MONTAGE

- À l'aide d'une clé Allen de 5 mm, retirez le boulon fixant le silencieux au support d'origine, comme illustré sur la photo 1.
- Retirez les boulons supérieurs fixant le support d'origine, comme indiqué sur la photo 2, puis retirez le support.
- Montez le nouveau support d'échappement R&G (article 1) - selon le modèle, l'entretoise incluse (article 5) devra être positionnée entre le cadre et le support. À l'aide d'une clé Allen de 5 mm, fixez les supports supérieurs avec les boulons M8 inclus (article 2 - avec entretoise, article 3 - sans entretoise) et rondelles (article 7), comme indiqué sur la photo 3.
- Selon le silencieux installé, fixer le support inférieur à l'aide soit du boulon M8 20 mm (article 4 - silencieux d'origine) soit du boulon M8 25 mm (article 3 - silencieux Scorpion), des rondelles (article 7) et de l'écrou (article 6), en utilisant une clé Allen de 5 mm et une clé de 13 mm comme indiqué sur la photo 4.
- Assurez-vous que le silencieux d'échappement soit solidement maintenu en place. Après avoir utilisé la moto, vérifiez régulièrement le serrage des boulons (par exemple lors du nettoyage de la moto).

Veillez noter qu'il est de votre responsabilité de vous assurer qu'aucune partie du support d'échappement ou de l'ensemble d'échappement ne s'encrasse ou ne puisse entrer en contact avec d'autres parties de la machine. Ne conduisez pas la moto tant que cet aspect n'a pas été vérifié et que vous n'avez pas comprimé la suspension arrière (si cela convient à la conception de la moto) pour tester cela correctement.

ISSUE 1 - 30/11/2020 (FB)



BLP0058

FITTING INSTRUCTIONS FOR BLP0058BK
FOOTREST BLANKING PLATES
SUZUKI SV650 A 2016-



THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED BELOW.
DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike

THE PARTS SHOWN MAY BE REPRESENTATIVE ONLY (FOR CLARITY OF INSTRUCTIONS ONLY)

Please note that in cases where kits are packed with rubber washers holding the components onto the bolt – *the rubber washers should be thrown away!*

TOOLS REQUIRED

- Set of Metric Allen Keys.

FITTING INSTRUCTIONS

- Remove the OEM pillion footrest on the left hand side of the bike.
- Place two of the counter-sunk bolts through the holes in the blanking plate with the longer bolt positioned in the hole located towards the rear end of the bike.
- Insert the spacer to the longer bolt just fitted.
- Offer the R&G blanking plate assembly into position and tighten into the threads on the subframe, as shown above.

ISSUE 1 25/07/2016 (HH)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good

Racing Technique Ltd T/A R&G
Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



BLP0058

engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



BLP0058

Instructions de montage BLP0058BK
Plaques d'obturation des repose-pieds
SUZUKI SV650 A 2016-



Le kit contient les articles exposés ci-dessous, vérifier que toutes les pièces soient présentes avant de procéder au montage.

LA FAÇON DONT LE KIT EST EMBALLE NE CORRESPOND PAS FORCEMENT A LA FAÇON DE MONTER LES PIECES SUR LA MOTO.

LES PARTIES PRESENTEES PEUVENT ETRE UNIQUEMENT REPRESENTATIVES (POUR LA CLARTE DES INSTRUCTIONS UNIQUEMENT)

Notez que si les kits sont emballés avec des rondelles en caoutchouc servant à tenir les composants, *ces rondelles doivent être jetées.*

OUTILS REQUIS

- Clés Allen.

NOTICE DE MONTAGE

- Enlever le repose pieds passager du côté gauche de la moto.
- Placer 2 boulons dans les trous d'une de la plaque d'obturation avec le plus long boulon positionné dans le trou orienté vers l'arrière de la moto.
- Insérer l'entretoise sur le plus long boulon tout juste inséré.
- Positionner la plaque R&G en position puis serrer dans le filetage du passage de roue, voir ci dessus.

ISSUE 1 25/07/2016 (HH)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products

Racing Technique Ltd T/A R&G
Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



BLP0058

R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.