




FITTING INSTRUCTIONS FOR SRG0084SS
STAINLESS-STEEL RADIATOR GUARDS
TRIUMPH TIGER 900 2020-

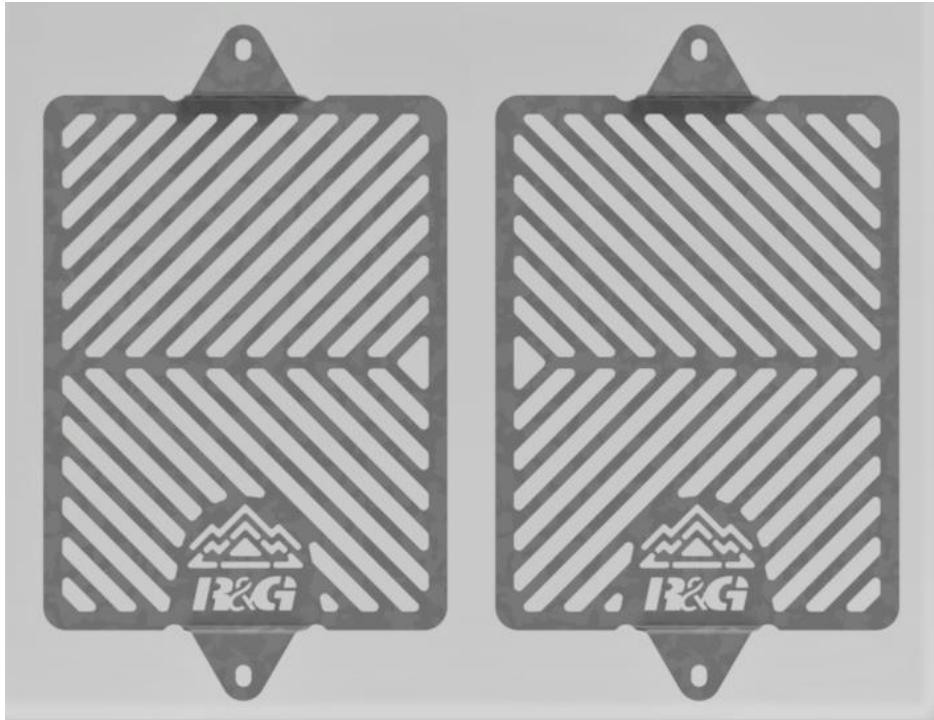

THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED OVER PAGE.

SOME PARTS MAY BE SHOWN FOR CLARITY OF INSTRUCTIONS ONLY.

DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING.

**IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF OUR DEALERS
OR HAVE FITTED BY A QUALIFIED TECHNICIAN.**

PLEASE NOTE THAT THE WAY THE KIT IS PACKED DOES NOT NECESSARILY REPRESENT THE WAY OF
MOUNTING TO THE BIKE.

IN THE EVENT OF RUBBER WASHERS BEING USED TO HOLD COMPONENTS ONTO BOLTS,
THESE RUBBER WASHERS CAN BE THROWN AWAY.

DIGITAL COPIES OF THESE INSTRUCTIONS ARE AVAILABLE FROM:

WWW.RG-RACING.COM




<u>TOOLS REQUIRED</u>	<u>GENERAL TORQUE SETTINGS</u>
<ul style="list-style-type: none"> 5mm A/F ALLEN TOOL 	M4 BOLT = 8Nm M5 BOLT = 12Nm M6 BOLT = 15Nm M8 BOLT = 20Nm M10 BOLT = 40Nm M12 BOLT = 40Nm

LEGEND

ITEM NO.	DESCRIPTION	QTY
ITEM 1	SS RAD0084 LEFT RADIATOR GUARD	1
ITEM 2	SS RAD0084 RIGHT RADIATOR GUARD	1
ITEM 3	100mm LENGTH OF SELF-ADHESIVE FOAM	4

FITTING PICTURES

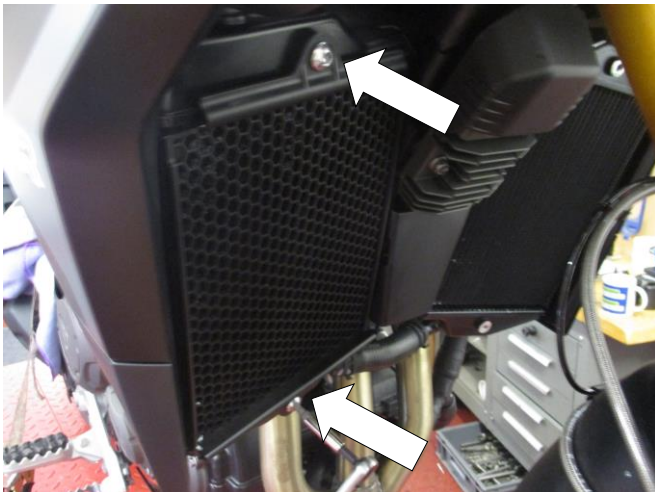

Picture 1



Picture 2



Picture 3



Picture 4

FITTING INSTRUCTIONS

- Remove the pair of bolts securing the OEM radiator guards using a 5mm Allen tool, as shown in **picture 1**, then remove the guards. Put the bolts to one side as they will be re-used later.
- Cut and arrange the self-adhesive foam (**item 3**) around the inner edge of both the LHS and RHS radiator guards (**items 1 & 2**), as shown in **picture 2**.
- Offer the radiator guards up to the bike and secure using the original bolts, as shown in **picture 3**.

ISSUE 1 - 20/08/2020 (FB)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.


R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



NOTICE DE MONTAGE POUR SRG0084SS
PROTECTION RADIATEUR
TRIUMPH TIGER 900 2020-

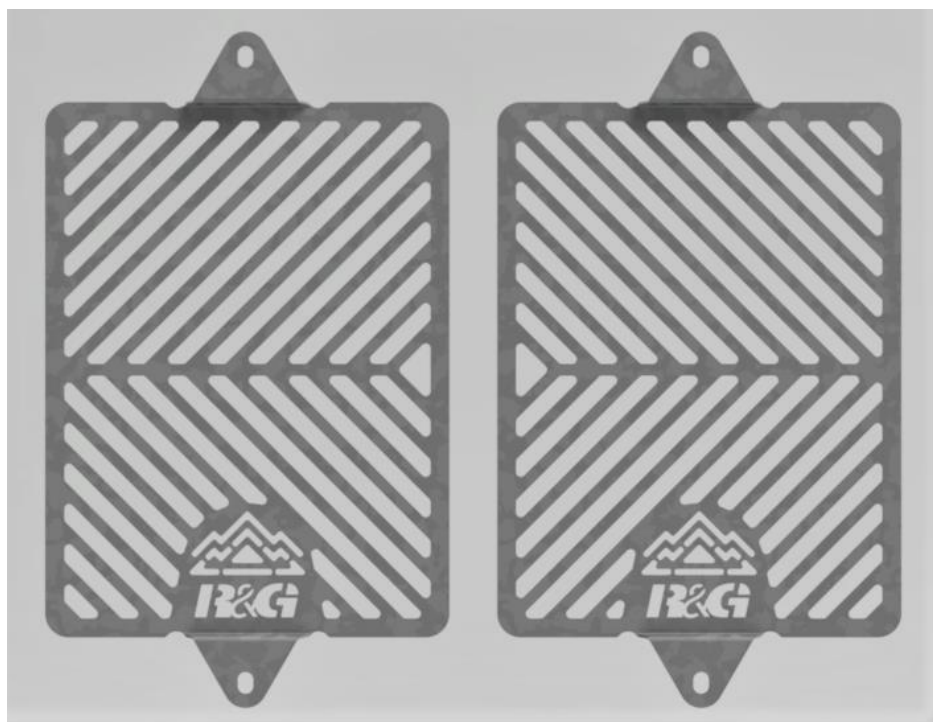

CE KIT CONTIENT LES ARTICLES ILLUSTRÉS ET ÉTIQUETES SUR LA PAGE.

CERTAINES PARTIES PEUVENT ÊTRE PRÉSENTES UNIQUEMENT POUR LA CLARTÉ DES INSTRUCTIONS.

NE PAS PROCÉDER AU MONTAGE TANT QUE VOUS N'ÊTES PAS SÛR QUE TOUTES LES PIÈCES SOIENT PRÉSENTES.

VEUILLEZ LIRE TOUTES LES INSTRUCTIONS AVANT DE CONTINUER.

EN CAS DE DOUTE LORS DU MONTAGE DE NOS PRODUITS, CONSULTEZ UN DE NOS REVENDEURS OU FAITES APPEL À UN TECHNICIEN QUALIFIÉ.

VEUILLEZ NOTER QUE LA FAÇON DONT LE KIT EST EMBALLÉ NE REPRÉSENTE PAS NECESSAIREMENT LA MANIÈRE DE LE MONTER SUR LA MOTO.

SI DES RONDELLES EN CAOUTCHOUC SONT UTILISÉES POUR MAINTENIR LES COMPOSANTS SUR LES BOULONS, ELLES PEUVENT ÊTRE JETÉES.

NOTICE DISPONIBLE AU TÉLÉCHARGEMENT SUR :

WWW.RG-RACING.COM

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



<u>OUTILS REQUIS</u>	<u>VALEURS DE SERRAGE</u>
<ul style="list-style-type: none"> CLÉ ALLEN 5mm 	M4 BOULON = 8Nm M5 BOULON = 12Nm M6 BOULON = 15Nm M8 BOULON = 20Nm M10 BOULON = 40Nm M12 BOULON = 40Nm

LÉGENDE

ARTICLE NO.	DESCRIPTION	QTÉ
ARTICLE 1	SS RAD0084 PROTECTION RADIATEUR GAUCHE	1
ARTICLE 2	SS RAD0084 PROTECTION RADIATEUR DROITE	1
ARTICLE 3	100mm MOUSSE AUTOCOLLANTE	4


NOTICE DE MONTAGE

- Retirez la paire de boulons fixant les protections de radiateur d'origine à l'aide d'une clé Allen de 5 mm, comme illustré sur la photo 1, puis retirez les protections. Mettez les boulons de côté car ils seront réutilisés plus tard.
- Coupez et disposez la mousse auto-autocollante (article 3) autour du bord intérieur des protections de radiateur gauche et droite (articles 1 et 2), comme indiqué sur la photo 2.
- Présentez les protections de radiateur sur la moto et fixez-les à l'aide des boulons d'origine, comme indiqué sur la photo 3.

ISSUE 1 - 20/08/2020 (FB)



MONTAGEANLEITUNG FÜR SRG0084SS
EDELSTAHL KÜHLERSCHUTZE
TRIUMPH TIGER 900 2020-

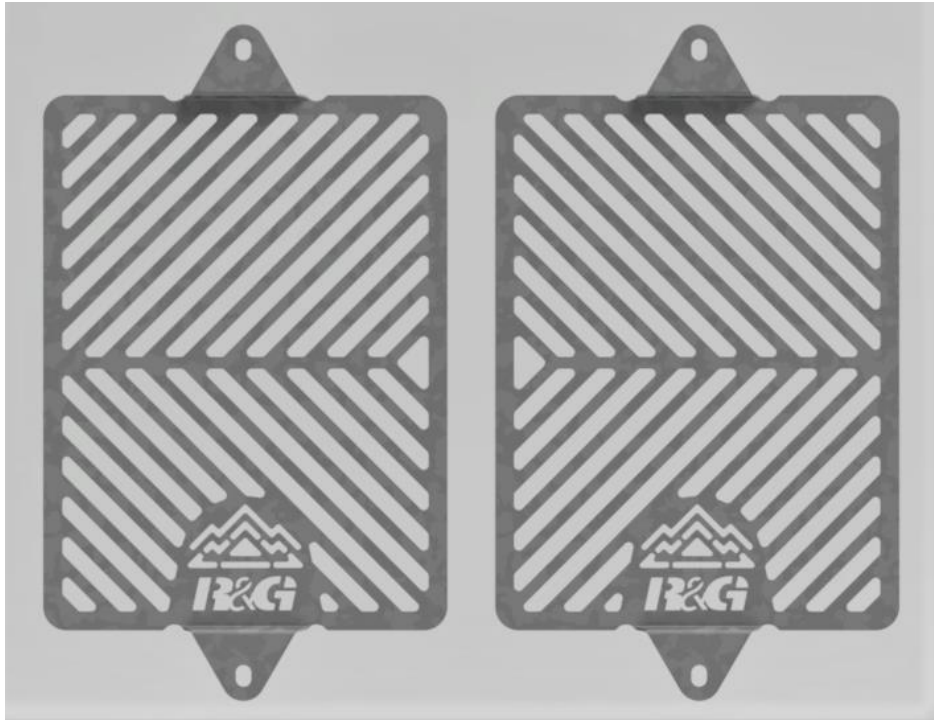

ALLE KIT-TEILE SIND UNTEN ABGEBILDET UND GEKENNZEICHNET.

DIE ABGEBILDETEN TEILE DIENEN LEDIGLICH ZUR ERKLÄRUNG.

ÜBERPRÜFEN SIE ZUERST, DASS ALLE TEILE VORHANDEN SIND.

LESEN SIE DIE MONTAGEANLEITUNG KOMPLETT DURCH, BEVOR SIE ANFANGEN.

WENN SIE BEI DER MONTAGE DIESES PRODUKTES UNSICHER SIND, BITTE EINEN UNSERER HÄNDLER KONTAKTIEREN ODER DAS KIT VON EINEM QUALIFIZIERTEN ZWEIRADMECHANIKER MONTIEREN LASSEN.

DIE VERPACKUNG DER TEILE STELLT NICHT DIE REIHENFOLGE DER MONTAGE DAR.

HINWEIS FÜR KITS MIT PLASTIKUNTERLEGSCHREIBEN AN DEN SCHRAUBEN –
DIESE PLASTIK-UNTERLEGSCHREIBEN WERDEN NICHT FÜR DEN EINBAU BENÖTIGT!

EINE DIGITALE VERSION DIESER MONTAGEANLEITUNG KANN AUF FOLGENDER SEITE HERUNTERGELADEN WERDEN: WWW.RG-RACING.COM



<u>SIE BENÖTIGEN FOLGENDES WERKEZEUG</u>	<u>ALLGEM. ANZUGSDREHMOMENT:</u>
<ul style="list-style-type: none"> 5mm A/F INBUSSCHLÜSSEL 	M4 SCHRAUBE = 8Nm M5 SCHRAUBE = 12Nm M6 SCHRAUBE = 15Nm M8 SCHRAUBE = 20Nm M10 SCHRAUBE = 40Nm M12 SCHRAUBE = 40Nm

LIEFERUMFANG

ARTIKEL NR.	BESCHREIBUNG	MENGE
ARTIKEL 1	SS RAD0084 KÜHLERSCHUTZ LINKE SEITE	1
ARTIKEL 2	SS RAD0084 KÜHLERSCHUTZ RECHTE SEITE	1
ARTIKEL 3	100mm SELBSTKLEBENDER SCHAUMSTOFFSTREIFEN	4

MONTAGEANLEITUNG

- Entfernen Sie die zwei Schrauben, die die original Kühlerschutze sichern mit einem 5mm Inbusschlüssel wie in **Abbildung 1** abgebildet. Danach die Kühlerschutze entfernen. Legen Sie die Schrauben zur Seite – diese werden später wieder montiert.
- Die selbstklebenden Schaumstoffstreifen (**Artikel 3**) schneiden und gleichmäßig verteilt am inneren Rahmen des linken und des rechten Kühlerschutzes (**Artikel 1 & 2**) anbringen wie in **Abbildung 2** abgebildet.
- Die Kühlerschutze ans Motorrad ansetzen und mit den Originalschrauben befestigen wie in **Abbildung 3** abgebildet.

AUSGABE 1 - 20/08/2020 (FB)